



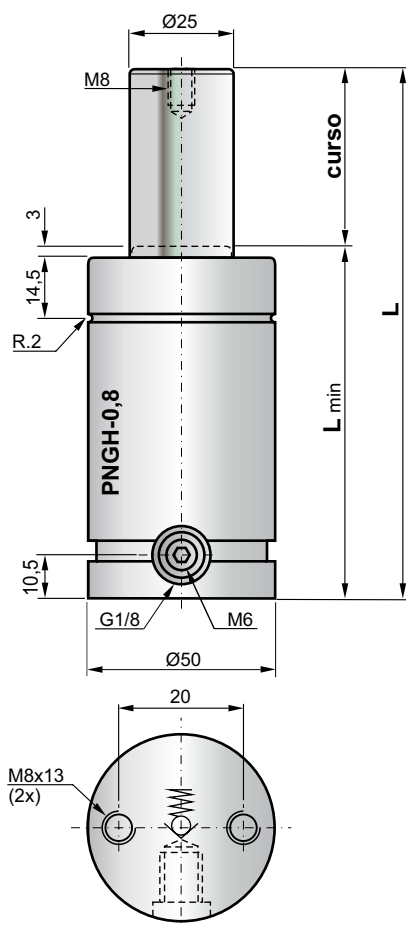


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar Inicial	Força daN Pressão à 150bar Final*	L K=70 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg
PNGH-0,8-010	10	736,3	970,6	90	80	20,3	0,933
PNGH-0,8-015	15	736,3	1.017	100	85	26,6	0,963
PNGH-0,8-020	20	736,3	1.049	110	90	32,8	1.042
PNGH-0,8-025	25	736,3	1.072	120	95	39,1	1.088
PNGH-0,8-032	32	736,3	1.094	134	102	47,9	1.138
PNGH-0,8-038	38	736,3	1.108	146	108	55,5	1.214
PNGH-0,8-050	50	736,3	1.128	170	120	70,5	1.326
PNGH-0,8-063	63	736,3	1.142	196	133	86,9	1.390
PNGH-0,8-075	75	736,3	1.152	220	145	102,0	1.462
PNGH-0,8-080	80	736,3	1.155	230	150	108,2	1.591
PNGH-0,8-100	100	736,3	1.164	270	170	133,4	1.787
PNGH-0,8-125	125	736,3	1.172	320	195	164,8	2.021
PNGH-0,8-160	160	736,3	1.180	390	230	208,8	2.341
PNGH-0,8-200	200	736,3	1.185	470	270	259,0	2.712


* Força Final Isotérmica a 20°C, curso totalmente atuado.

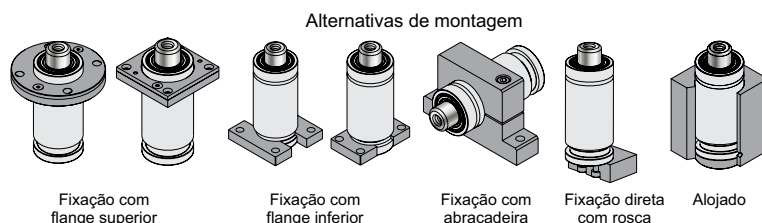


PNB-54-050

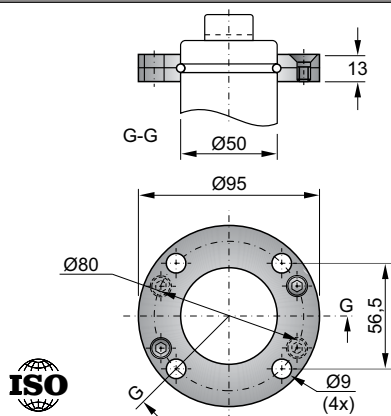


PNB-65-050

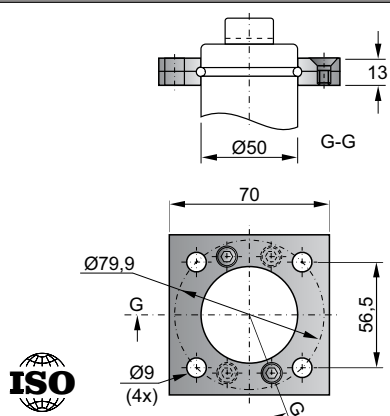


PNB-55-050

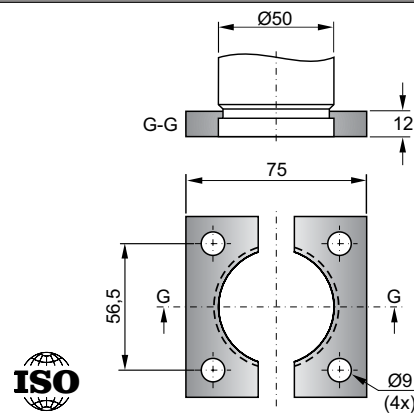


PNB-32-050

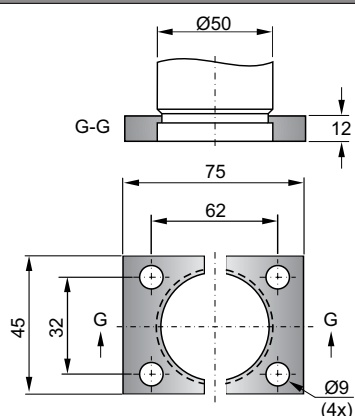

PNB-57-050

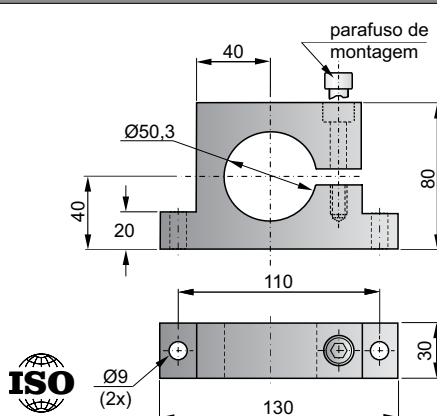

PNB-56-050

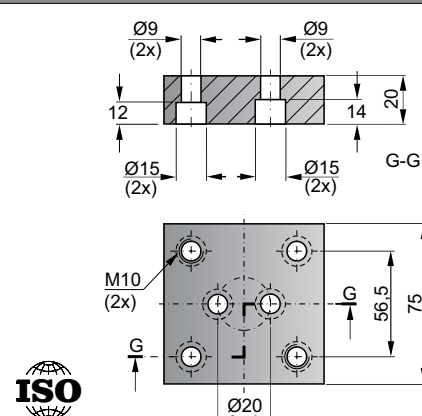

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.