

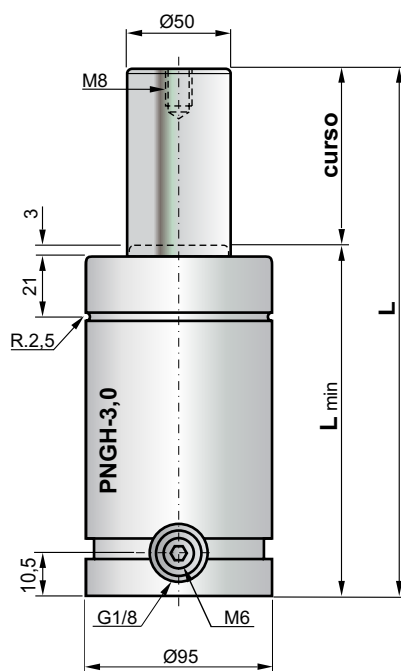


Código	Curso Cilindro (mm)	Força daN Pressão a 150bar Inicial	Força daN Final*	L K=102 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg
PNGH-3,0-015	15	2.945	4.111	132	117	103,8	5.338
PNGH-3,0-020	20	2.945	4.234	142	122	128,9	5.498
PNGH-3,0-025	25	2.945	4.321	152	127	154,1	5.657
PNGH-3,0-032	32	2.945	4.408	166	134	189,3	5.880
PNGH-3,0-038	38	2.945	4.462	178	140	219,4	6.071
PNGH-3,0-050	50	2.945	4.537	202	152	279,7	6.453
PNGH-3,0-063	63	2.945	4.590	228	165	345,1	6.866
PNGH-3,0-075	75	2.945	4.625	252	177	405,4	7.248
PNGH-3,0-080	80	2.945	4.636	262	182	430,5	7.407
PNGH-3,0-100	100	2.945	4.672	302	202	531,1	8.045
PNGH-3,0-125	125	2.945	4.702	352	227	656,7	8.840
PNGH-3,0-160	160	2.945	4.729	422	262	832,7	9.954
PNGH-3,0-200	200	2.945	4.749	502	302	1.033,7	11.227


* Força Final Isotérmica a 20°C, curso totalmente atuado.

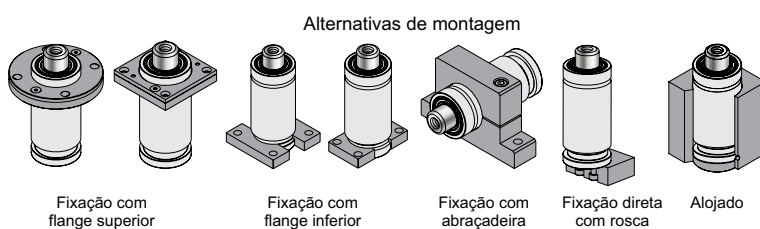


PNB-54-095

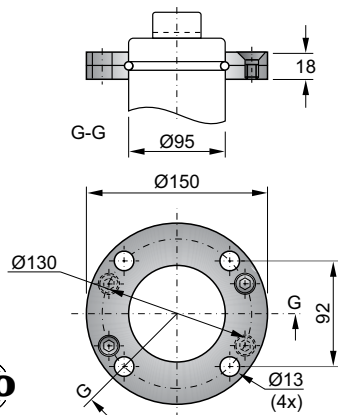


PNB-65-095

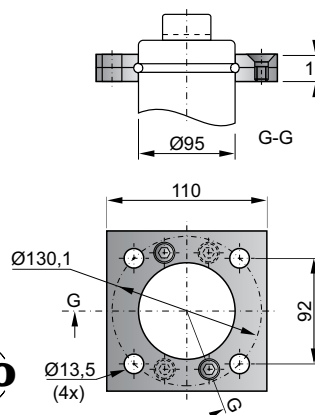


PNB-55-095

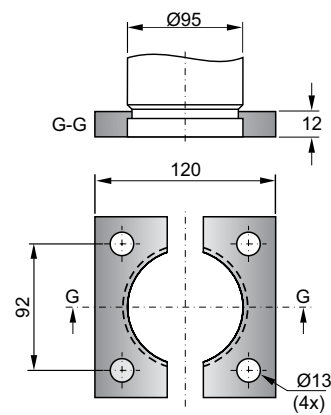


PNB-32-095

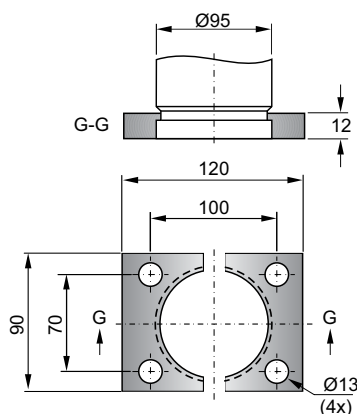

PNB-57-095

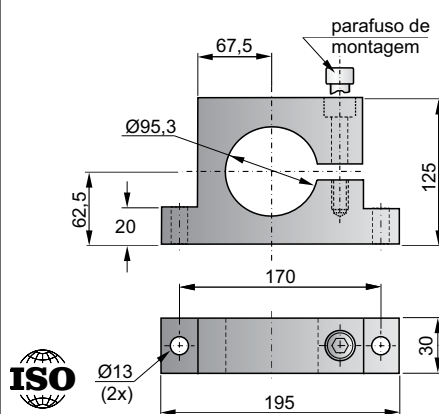

PNB-56-095

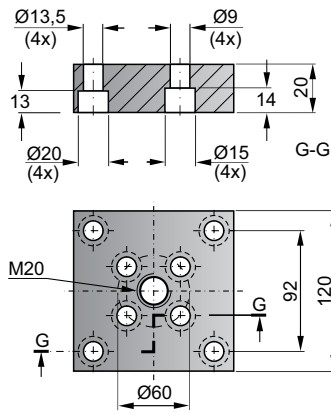

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.