

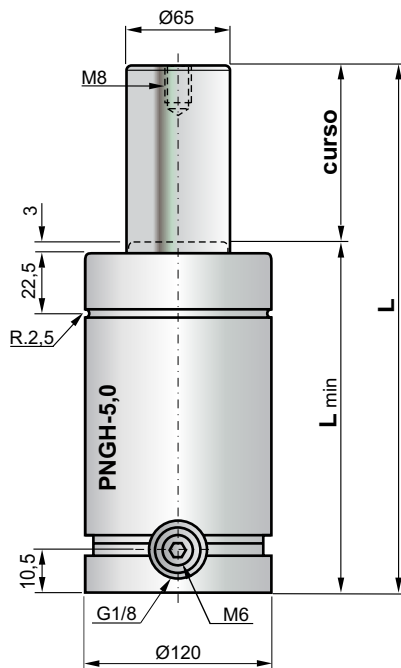


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar Inicial	Força daN Pressão à 150bar Final*	L K=102 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg
PNGH-5,0-015	15	4.912	6.831	132	117	183,3	8.549
PNGH-5,0-020	20	4.912	7.090	142	122	222,6	8.815
PNGH-5,0-025	25	4.912	7.284	152	127	261,9	9.082
PNGH-5,0-032	32	4.912	7.485	166	134	316,9	9.454
PNGH-5,0-038	38	4.912	7.615	178	140	364,0	9.772
PNGH-5,0-050	50	4.912	7.802	202	152	458,2	10.411
PNGH-5,0-063	63	4.912	7.939	228	165	560,3	11.102
PNGH-5,0-075	75	4.912	8.030	252	177	654,6	11.740
PNGH-5,0-080	80	4.912	8.061	262	182	693,9	12.006
PNGH-5,0-100	100	4.912	8.158	302	202	850,9	13.069
PNGH-5,0-125	125	4.912	8.241	352	227	1.047,3	14.398
PNGH-5,0-160	160	4.912	8.317	422	262	1.322,2	16.260
PNGH-5,0-200	200	4.912	8.373	502	302	1.636,3	18.387
PNGH-5,0-250	250	4.912	8.419	602	352	2.029,0	21.045


* Força Final Isotérmica a 20°C, curso totalmente atuado.

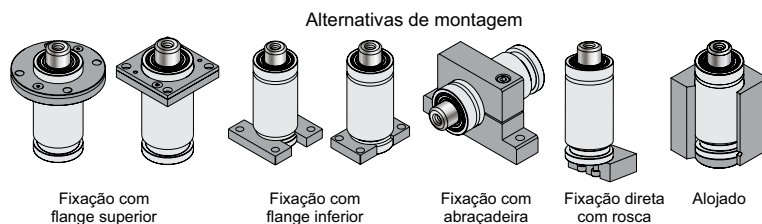


PNB-54-120

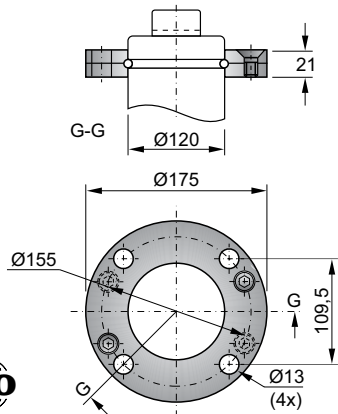


PNB-65-120

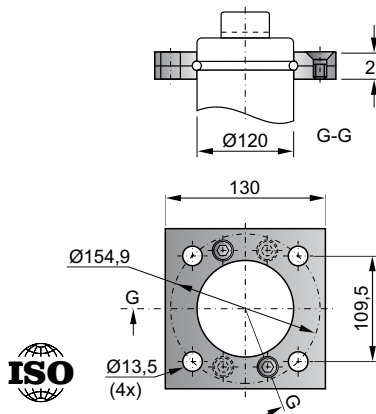


PNB-55-120

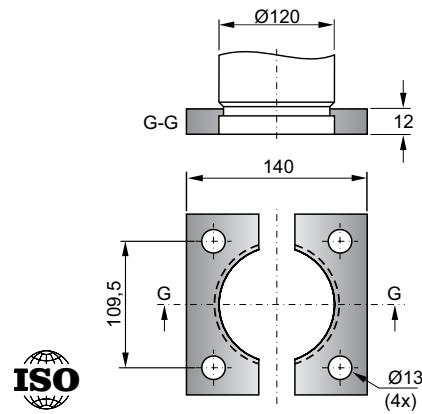


PNB-32-120

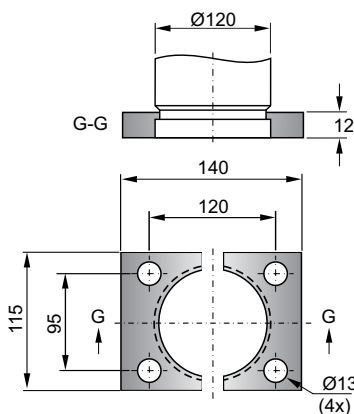

PNB-57-120

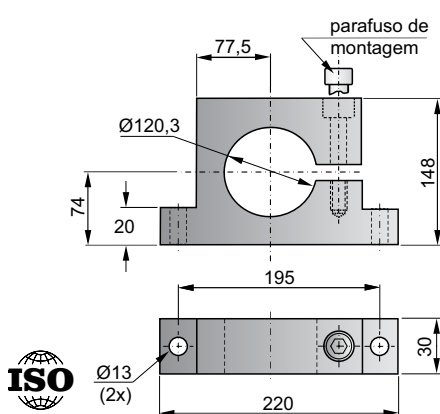

PNB-56-120

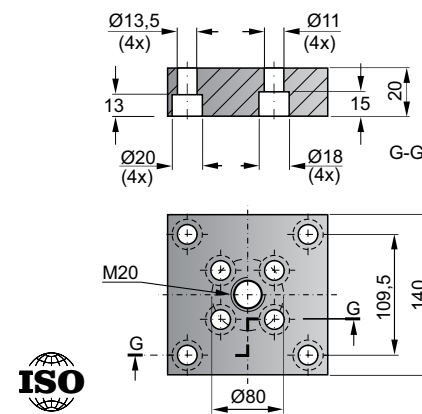

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.