



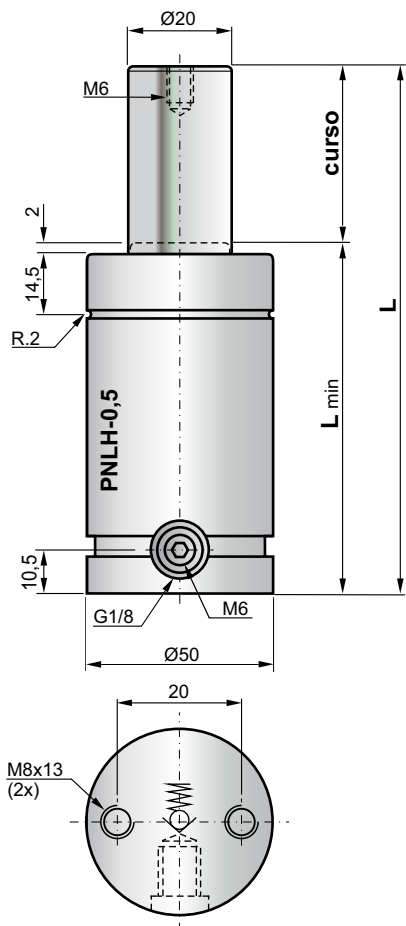


Código	Curso Cilindro (mm)	Força da N Pressão à 150bar Inicial	Força da N Pressão à 150bar Final*	L K=85 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg
PNLH-0,5-010	10	471,2	562,8	105	95	19,2	1.212
PNLH-0,5-015	15	471,2	577,6	115	100	25,5	1.259
PNLH-0,5-020	20	471,2	586,9	125	105	31,8	1.298
PNLH-0,5-025	25	471,2	593,4	135	110	38,1	1.342
PNLH-0,5-032	32	471,2	599,6	149	117	46,9	1.392
PNLH-0,5-038	38	471,2	603,4	161	123	54,4	1.441
PNLH-0,5-050	50	471,2	608,6	185	135	69,5	1.541
PNLH-0,5-063	63	471,2	612,3	211	148	85,8	1.642
PNLH-0,5-075	75	471,2	614,6	235	160	100,9	1.738
PNLH-0,5-080	80	471,2	615,4	245	165	107,2	1.775
PNLH-0,5-100	100	471,2	617,8	285	185	132,3	1.935
PNLH-0,5-125	125	471,2	619,8	335	210	163,8	2.132
PNLH-0,5-160	160	471,2	621,6	405	245	207,7	2.427
PNLH-0,5-200	200	471,2	622,9	485	285	258,0	2.737

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

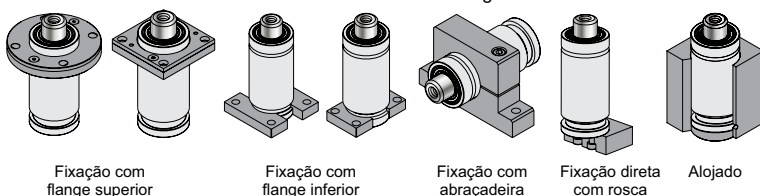


PNB-54-050

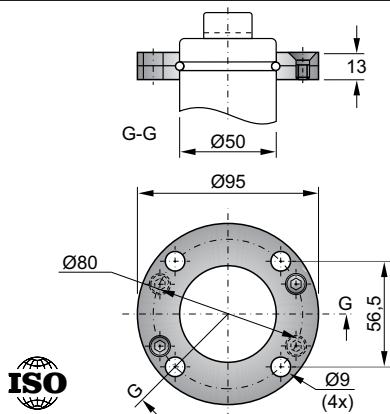


PNB-65-050

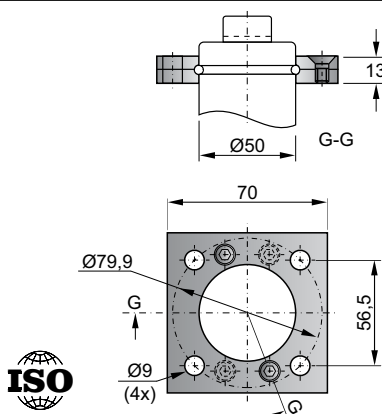


PNB-55-050

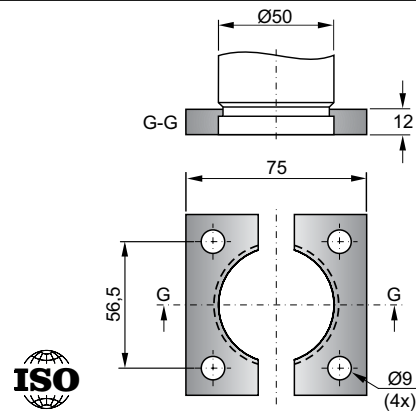


PNB-32-050

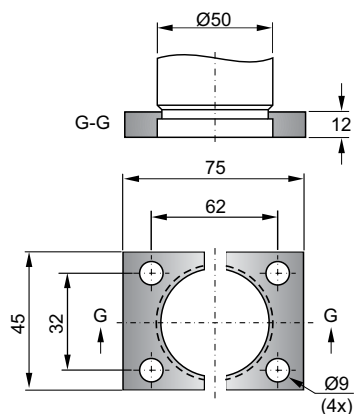

PNB-57-050

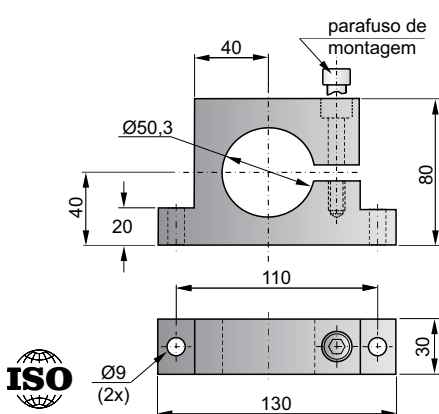

PNB-56-050

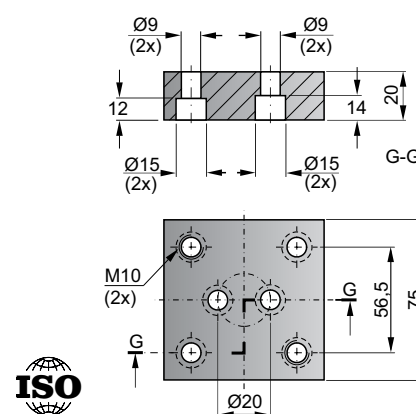

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.