



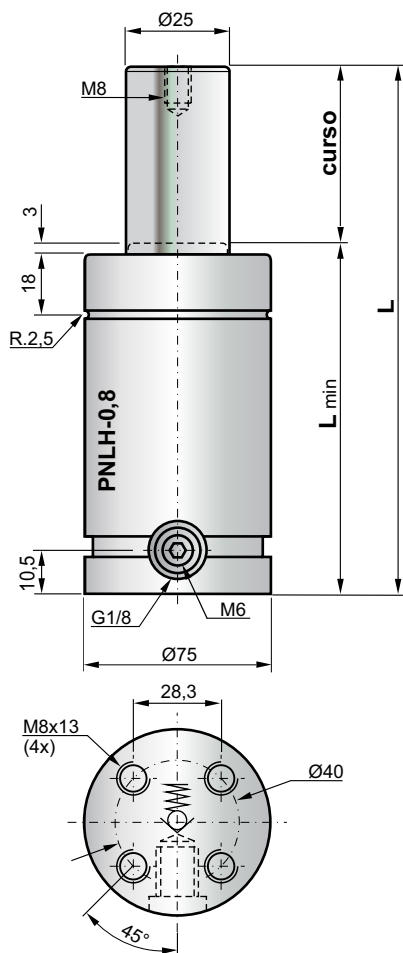


Código	Curso Cilindro (mm)	Força da N Pressão à 150bar Inicial	Força da N Pressão à 150bar Final*	L K=95 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg
PNLH-0,8-015	15	736,3	828,8	125	110	65,9	3.121
PNLH-0,8-020	20	736,3	837,1	135	115	81,5	3.186
PNLH-0,8-025	25	736,3	842,8	145	120	97,1	3.258
PNLH-0,8-032	32	736,3	848,3	159	127	118,9	3.349
PNLH-0,8-038	38	736,3	851,7	171	133	137,6	3.431
PNLH-0,8-050	50	736,3	856,3	195	145	175,0	3.611
PNLH-0,8-063	63	736,3	859,6	221	158	215,5	3.780
PNLH-0,8-075	75	736,3	861,7	245	170	252,9	3.956
PNLH-0,8-080	80	736,3	862,4	255	175	268,5	4.035
PNLH-0,8-100	100	736,3	864,5	295	195	330,9	4.310
PNLH-0,8-125	125	736,3	866,3	345	220	408,8	4.662
PNLH-0,8-160	160	736,3	867,9	415	255	517,9	5.127
PNLH-0,8-200	200	736,3	869,0	495	295	642,6	5.724
PNLH-0,8-250	250	736,3	870,0	595	345	798,4	6.374


* Força Final Isotérmica a 20°C, curso totalmente atuado.

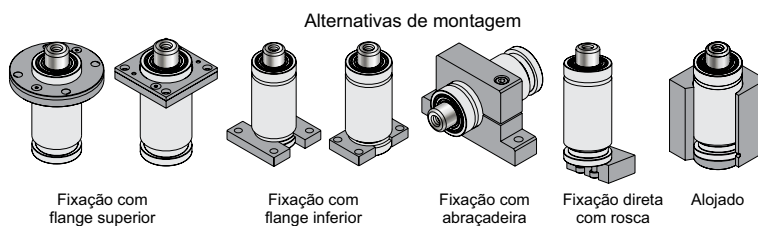


PNB-54-075

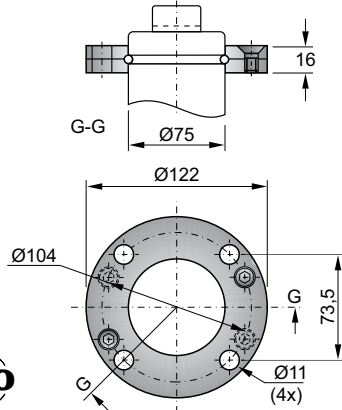


PNB-65-075

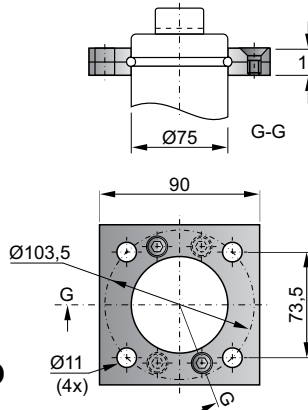


PNB-55-075

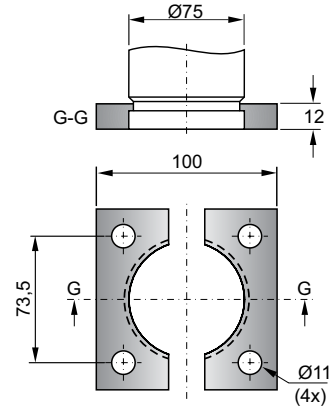


PNB-32-075

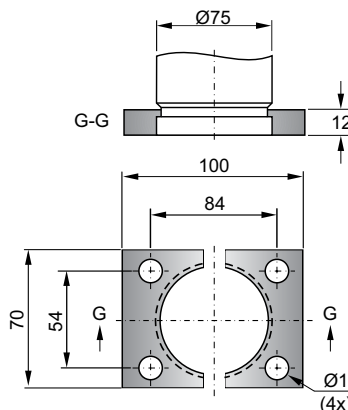

PNB-57-075

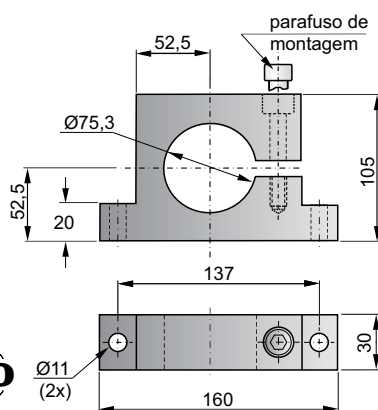

PNB-56-075

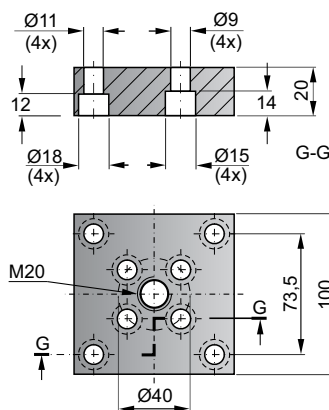

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.