



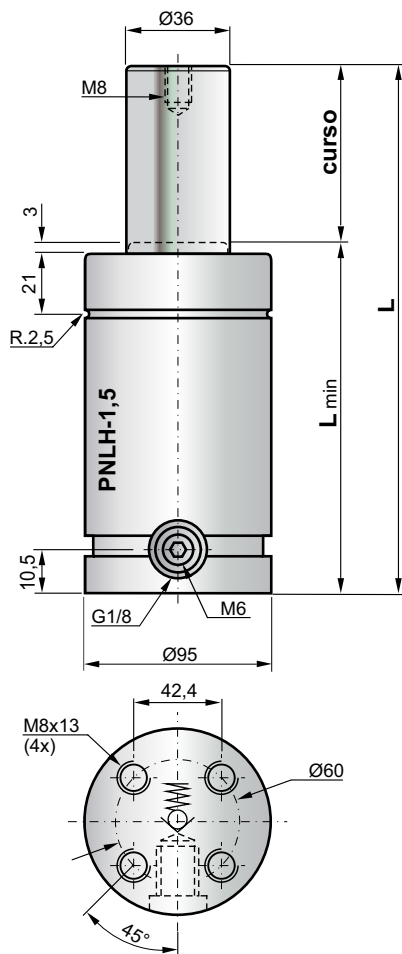


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar Inicial Final*		L K=110 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg
PNLH-1,5-015	15	1.526	1.780	140	125	107,1	5.733
PNLH-1,5-020	20	1.526	1.804	150	130	132,2	5.842
PNLH-1,5-025	25	1.526	1.821	160	135	157,4	5.973
PNLH-1,5-032	32	1.526	1.837	174	142	192,5	6.124
PNLH-1,5-038	38	1.526	1.847	186	148	222,7	6.286
PNLH-1,5-050	50	1.526	1.861	210	160	283,0	6.550
PNLH-1,5-063	63	1.526	1.871	236	173	348,4	6.883
PNLH-1,5-075	75	1.526	1.877	260	185	408,7	7.166
PNLH-1,5-080	80	1.526	1.879	270	190	433,8	7.275
PNLH-1,5-100	100	1.526	1.886	310	210	534,4	7.772
PNLH-1,5-125	125	1.526	1.891	360	235	660,0	8.349
PNLH-1,5-160	160	1.526	1.896	430	270	835,9	9.222
PNLH-1,5-200	200	1.526	1.899	510	310	1.037,0	10.213
PNLH-1,5-250	250	1.526	1.902	610	360	1.288,3	11.435
PNLH-1,5-300	300	1.526	1.904	710	410	1.539,7	12.656


* Força Final Isotérmica a 20°C, curso totalmente atuado.

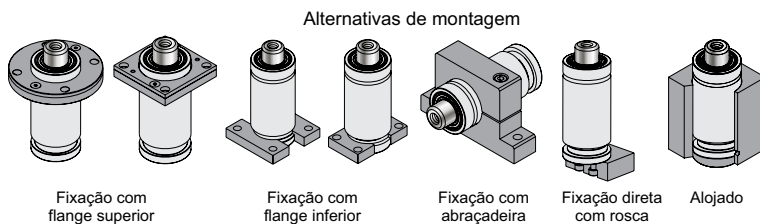


PNB-54-095

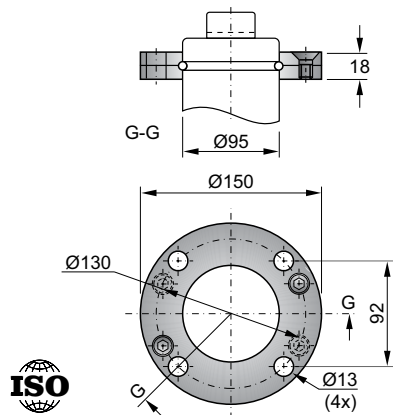


PNB-65-095

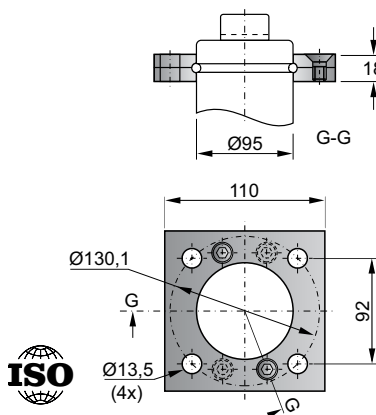


PNB-55-095

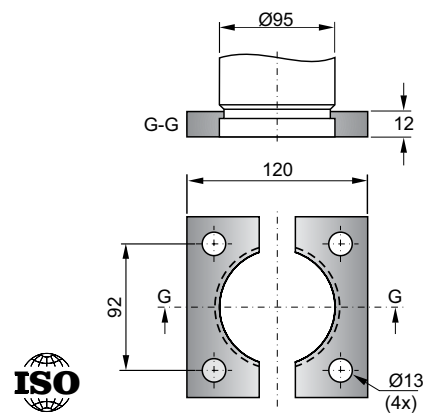


PNB-32-095

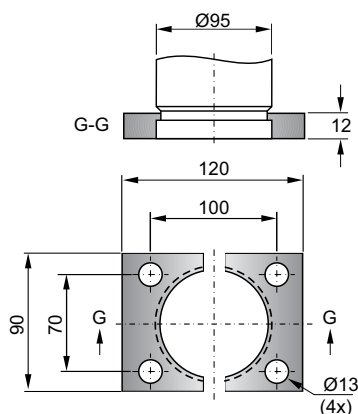

PNB-57-095

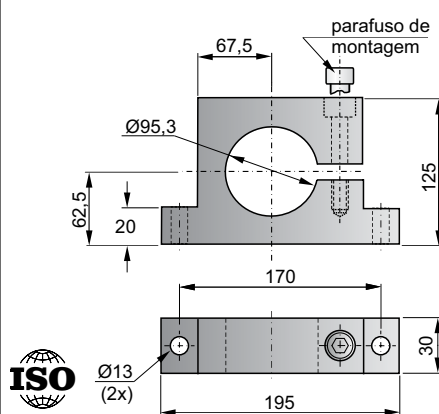

PNB-56-095

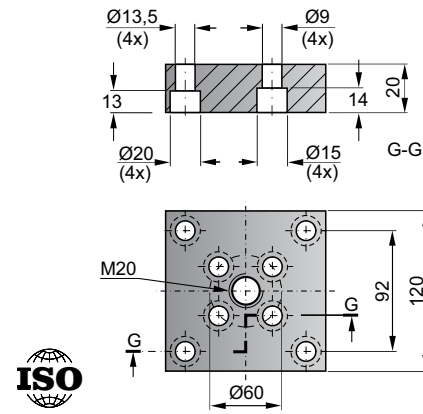

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.