

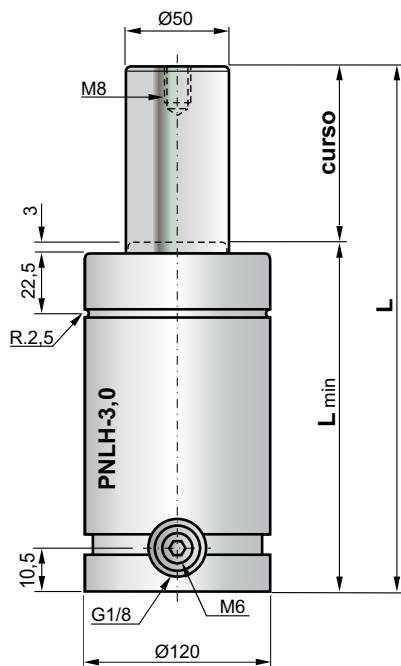


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar Inicial Final*		L K=120 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg
PNLH-3,0-015	15	2.945	3.606	150	135	160,7	10.510
PNLH-3,0-020	20	2.945	3.664	160	140	199,9	10.721
PNLH-3,0-025	25	2.945	3.705	170	145	239,2	10.931
PNLH-3,0-032	32	2.945	3.744	184	152	294,2	11.230
PNLH-3,0-038	38	2.945	3.769	196	158	341,3	11.482
PNLH-3,0-050	50	2.945	3.802	220	170	435,6	11.992
PNLH-3,0-063	63	2.945	3.825	246	183	537,7	12.544
PNLH-3,0-075	75	2.945	3.840	270	195	631,9	13.056
PNLH-3,0-080	80	2.945	3.845	280	200	671,2	13.267
PNLH-3,0-100	100	2.945	3.860	320	220	828,3	14.116
PNLH-3,0-125	125	2.945	3.872	370	245	1.024,6	15.178
PNLH-3,0-160	160	2.945	3.884	440	280	1.299,5	16.665
PNLH-3,0-200	200	2.945	3.892	520	320	1.613,6	18.365
PNLH-3,0-250	250	2.945	3.899	620	370	2.006,3	20.489
PNLH-3,0-300	300	2.945	3.903	720	420	2.399,0	22.614


* Força Final Isotérmica a 20°C, curso totalmente atuado.

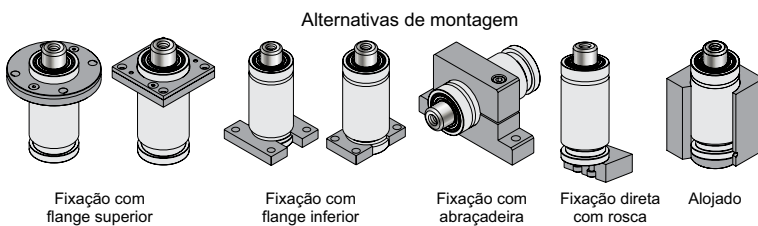


PNB-54-120

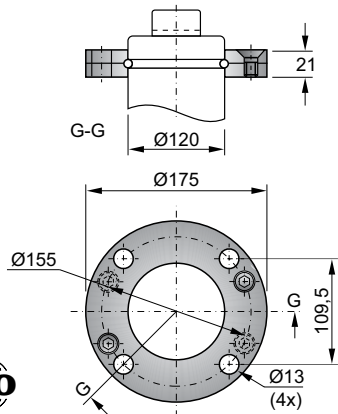


PNB-65-120

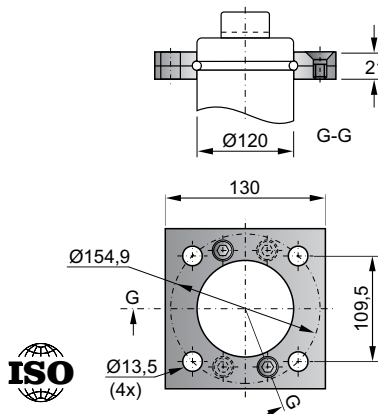


PNB-55-120

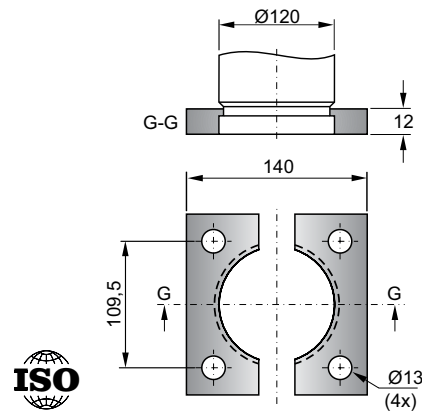


PNB-32-120

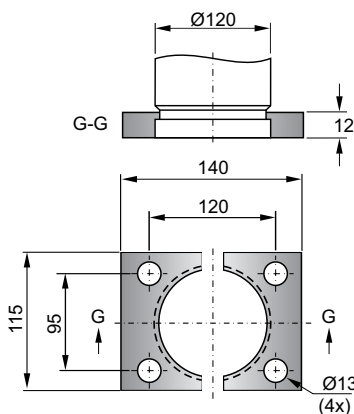

PNB-57-120

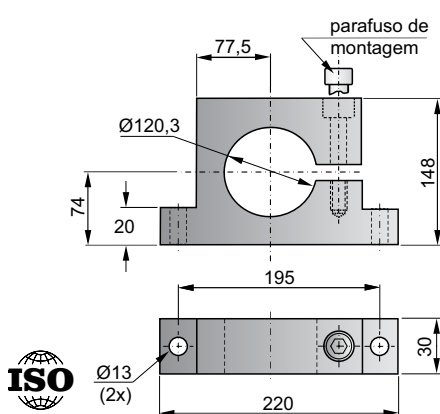

PNB-56-120

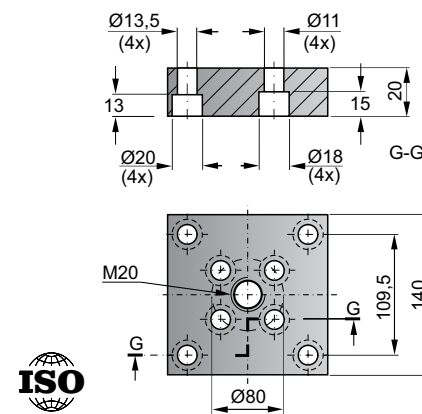

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.