



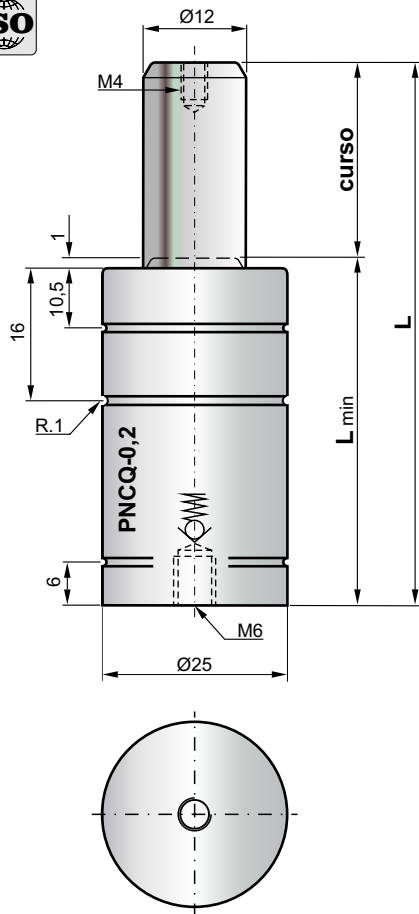


Código	Curso Cilindro (mm)	Força da N Pressão à 150bar		L K=42 / K=45 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
PNCQ-0,2-007	7	169,6	218,5	56	49	3,5	0,146	
PNCQ-0,2-010	10	169,6	226,9	62	52	4,4	0,154	
PNCQ-0,2-015	15	169,6	235,7	72	57	6,0	0,165	✓
PNCQ-0,2-020	20	169,6	241,2	82	62	7,6	0,176	
PNCQ-0,2-025	25	169,6	245,0	92	67	9,1	0,188	✓
PNCQ-0,2-032	32	169,6	248,6	106	74	11,3	0,203	
PNCQ-0,2-038	38,1	169,6	250,8	118,2	80,1	13,2	0,217	✓
PNCQ-0,2-050	50	169,6	253,8	142	92	17,0	0,243	✓
PNCQ-0,2-063	63	169,6	255,9	168	105	21,1	0,273	
PNCQ-0,2-064	63,5	169,6	256,9	172	108,5	21,1	0,283	✓
PNCQ-0,2-075	75	169,6	257,2	195	120	24,9	0,311	
PNCQ-0,2-080	80	169,6	257,7	205	125	26,4	0,322	✓
PNCQ-0,2-100	100	169,6	259,1	245	145	32,7	0,367	✓
PNCQ-0,2-125	125	169,6	260,2	295	170	40,6	0,425	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

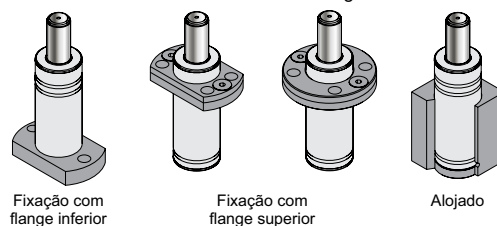


PNB-92-025

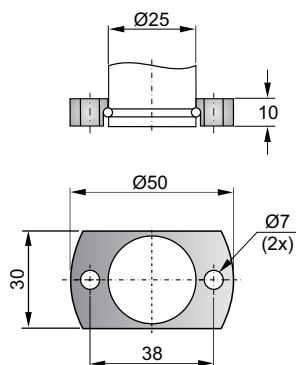


PNB-66-025

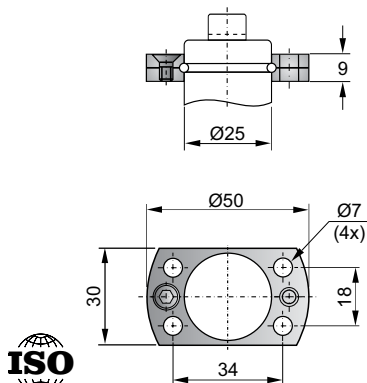

PNB-89-025-VDI

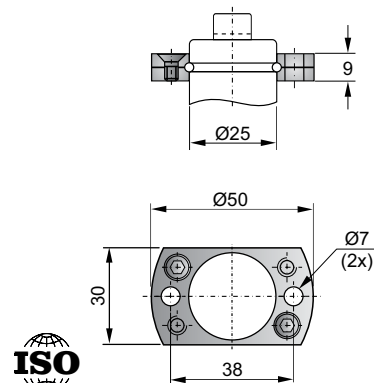

PNB-54-025

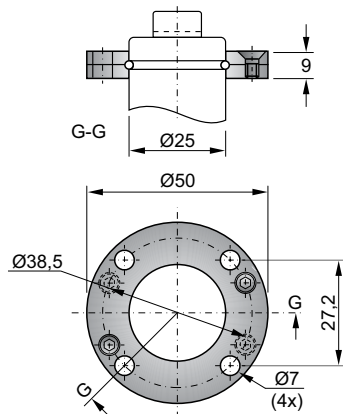

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.