

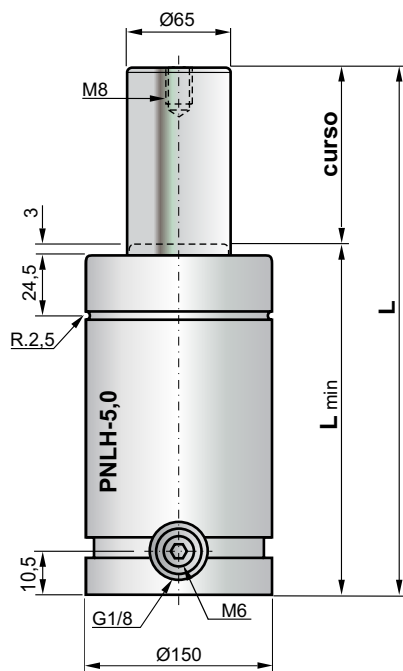


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar Inicial	Força daN Pressão à 150bar Final*	L K=140 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg
PNLH-5,0-015	15	4.977	6.068	170	155	276,8	19.234
PNLH-5,0-020	20	4.977	6.192	180	160	338,1	19.575
PNLH-5,0-025	25	4.977	6.281	190	165	399,5	19.917
PNLH-5,0-032	32	4.977	6.371	204	172	485,4	20.397
PNLH-5,0-038	38	4.977	6.427	216	178	559,0	20.807
PNLH-5,0-050	50	4.977	6.505	240	190	706,3	21.629
PNLH-5,0-063	63	4.977	6.561	266	203	865,8	22.518
PNLH-5,0-075	75	4.977	6.598	290	215	1.013,1	23.340
PNLH-5,0-080	80	4.977	6.610	300	220	1.074,4	23.682
PNLH-5,0-100	100	4.977	6.649	340	240	1.319,9	25.050
PNLH-5,0-125	125	4.977	6.681	390	265	1.626,7	26.761
PNLH-5,0-160	160	4.977	6.710	460	300	2.056,2	29.157
PNLH-5,0-200	200	4.977	6.731	540	340	2.547,1	31.894
PNLH-5,0-250	250	4.977	6.748	640	390	3.160,0	35.316
PNLH-5,0-300	300	4.977	6.760	740	440	3.774,3	38.738


* Força Final Isotérmica a 20°C, curso totalmente atuado.

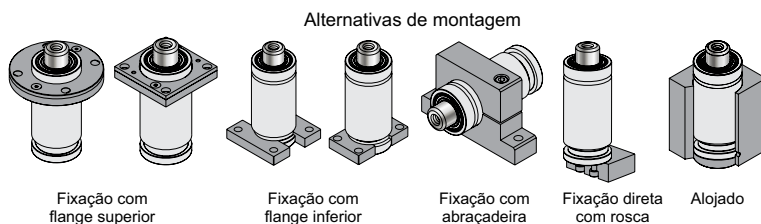


PNB-54-150

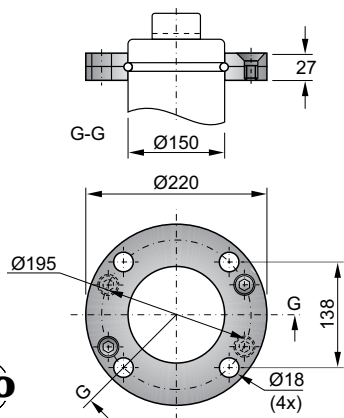


PNB-65-150

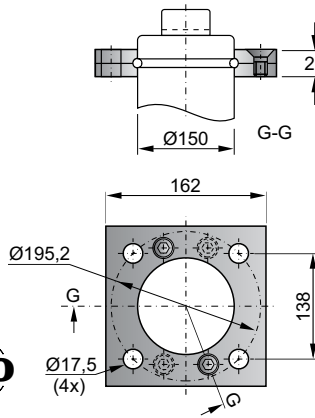


PNB-55-150

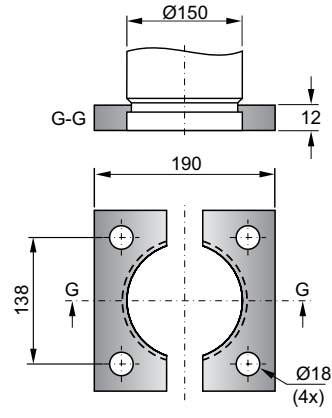


PNB-32-150

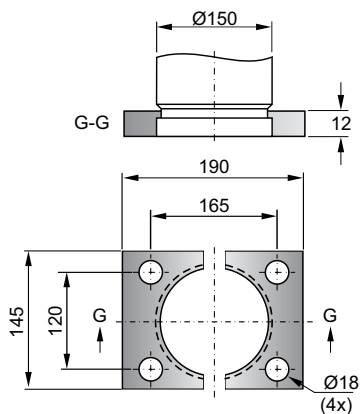

PNB-57-150

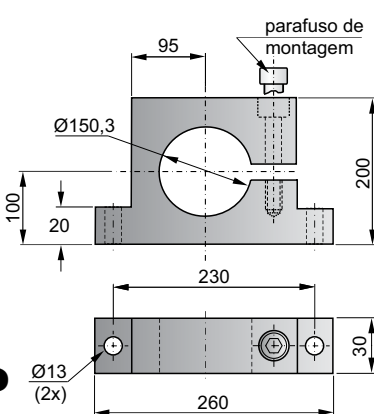

PNB-56-150

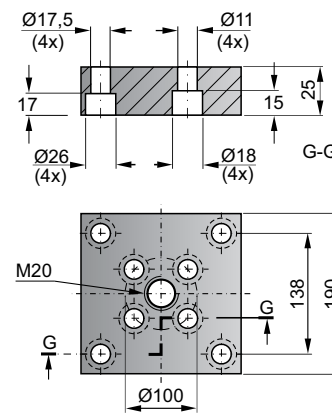

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.