



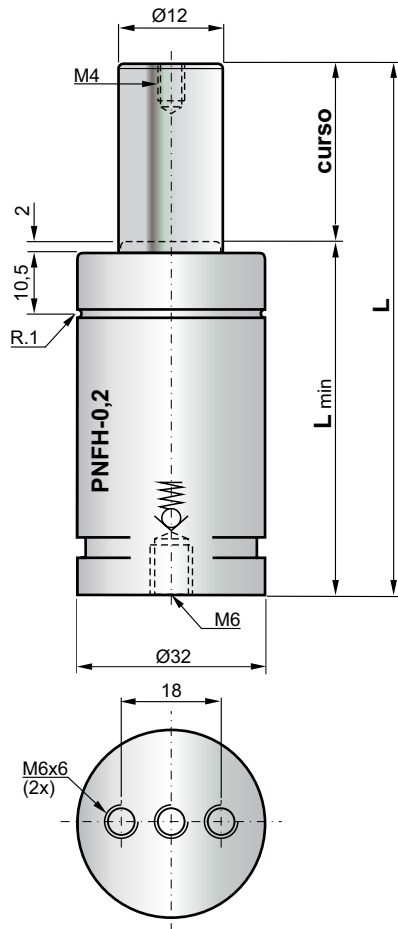


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar		L K=50 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
PNFH-0,2-007	7	169,6	198,3	64	57	5,4	0,286	
PNFH-0,2-010	10	169,6	203,3	70	60	6,8	0,296	✓
PNFH-0,2-015	15	169,6	208,5	80	65	9,0	0,313	
PNFH-0,2-020	20	169,6	211,8	90	70	11,3	0,329	
PNFH-0,2-025	25	169,6	214,0	100	75	13,6	0,346	✓
PNFH-0,2-032	32	169,6	216,8	114	82	16,7	0,370	
PNFH-0,2-038	38	169,6	217,6	126	88	19,4	0,389	
PNFH-0,2-050	50	169,6	219,4	150	100	24,9	0,430	✓
PNFH-0,2-063	63	169,6	220,6	176	113	30,8	0,472	
PNFH-0,2-075	75	169,6	221,4	200	125	36,2	0,513	
PNFH-0,2-080	80	169,6	221,7	210	130	38,4	0,529	✓
PNFH-0,2-100	100	169,6	222,5	250	150	47,5	0,596	✓
PNFH-0,2-125	125	169,6	223,2	300	175	58,8	0,679	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

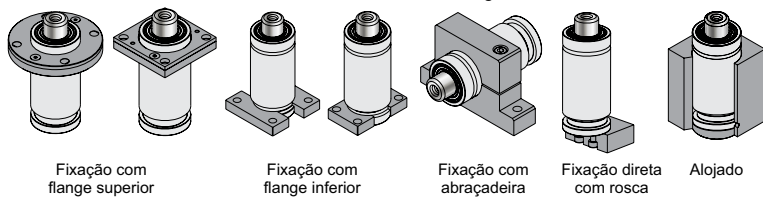


PNB-54-032

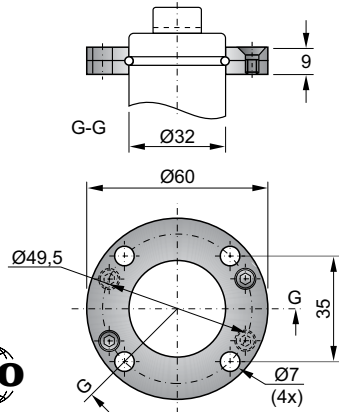


PNB-65-032

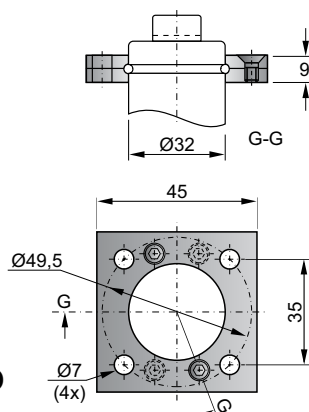


PNB-55-032

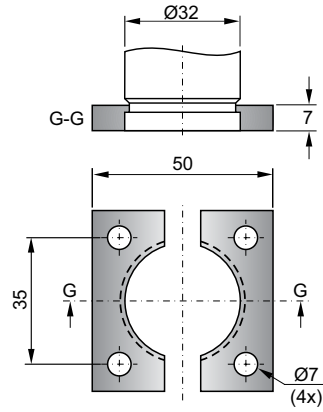

PNB-32-032

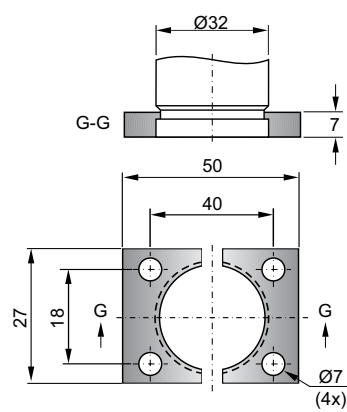

PNB-57-032

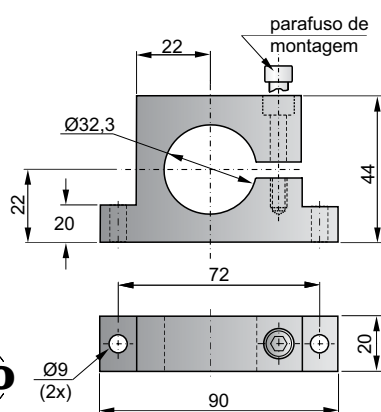

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.