



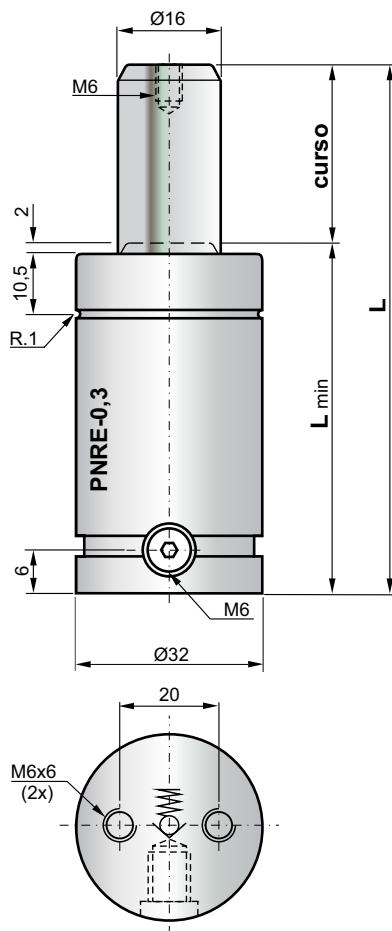


Código	Curso Cilindro (mm)	Força da N Pressão à 150bar		L K=30 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
PNRE-0,3-010	10	301,5	402,4	50	40	8,0	0,169	✓
PNRE-0,3-015	15	301,5	424,7	60	45	10,3	0,189	
PNRE-0,3-020	20	301,5	440,1	70	50	12,7	0,208	
PNRE-0,3-025	25	301,5	451,3	80	55	15,1	0,230	✓
PNRE-0,3-032	32	301,5	462,7	94	62	18,4	0,259	
PNRE-0,3-038	38	301,5	469,9	106	68	21,3	0,285	✓
PNRE-0,3-050	50	301,5	480,1	130	80	27,0	0,334	✓
PNRE-0,3-063	63	301,5	487,5	156	93	33,2	0,385	✓
PNRE-0,3-075	75	301,5	492,4	180	105	38,9	0,429	
PNRE-0,3-080	80	301,5	494,0	190	110	41,2	0,456	✓
PNRE-0,3-100	100	301,5	499,2	230	130	50,7	0,538	✓
PNRE-0,3-125	125	301,5	503,5	280	155	62,6	0,641	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

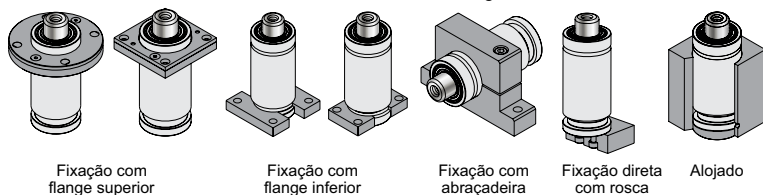


PNB-54-032

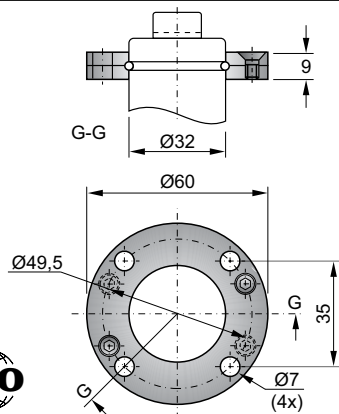


PNB-65-032

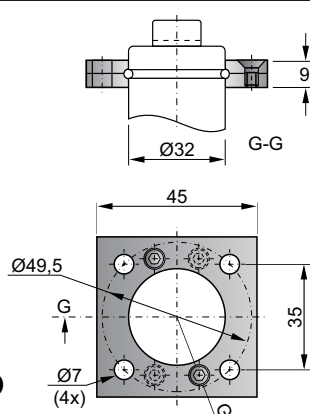


PNB-55-032

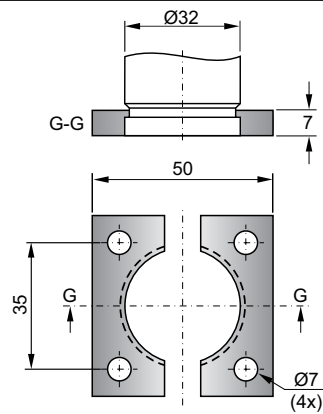

PNB-32-032

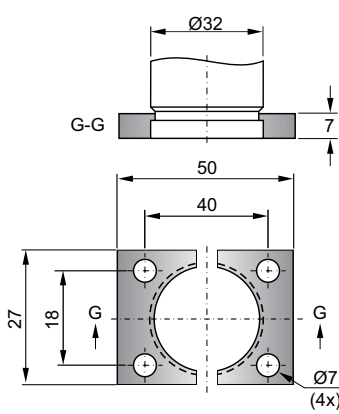

PNB-57-032

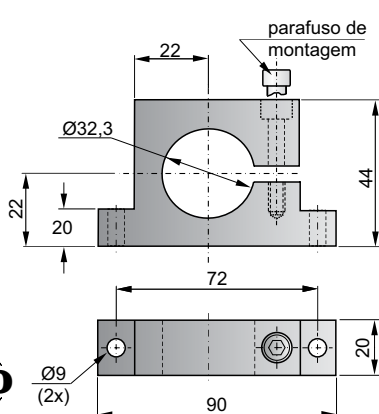

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.