



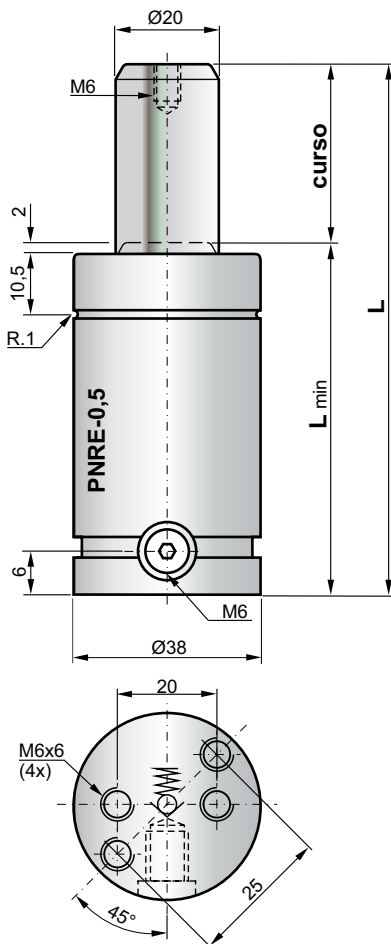


Código	Curso Cilindro (mm)	Força da N Pressão à 150bar Inicial	Força da N Pressão à 150bar Final*	L K=30 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
PNRE-0,5-010	10	471,2	636,2	50	40	12,1	0,234	✓
PNRE-0,5-015	15	471,2	666,7	60	45	16,0	0,257	
PNRE-0,5-020	20	471,2	686,5	70	50	20,0	0,287	
PNRE-0,5-025	25	471,2	700,4	80	55	23,9	0,307	✓
PNRE-0,5-032	32	471,2	714,2	94	62	29,5	0,342	
PNRE-0,5-038	38	471,2	722,8	106	68	34,3	0,377	✓
PNRE-0,5-050	50	471,2	734,6	130	80	43,8	0,434	✓
PNRE-0,5-063	63	471,2	743,0	156	93	54,1	0,506	✓
PNRE-0,5-075	75	471,2	748,4	180	105	63,6	0,563	
PNRE-0,5-080	80	471,2	750,2	190	110	67,5	0,590	✓
PNRE-0,5-100	100	471,2	755,8	230	130	83,4	0,685	✓
PNRE-0,5-125	125	471,2	760,5	280	155	103,2	0,812	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

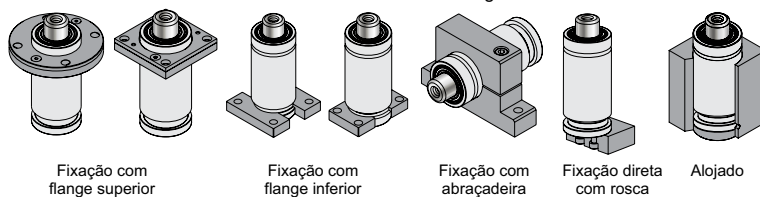


PNB-54-038

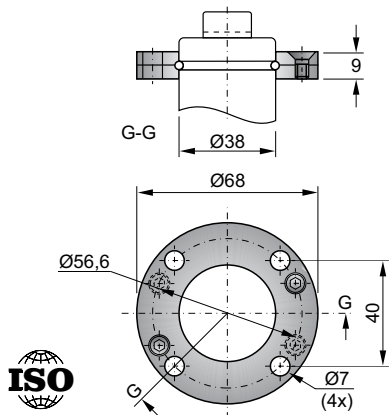


PNB-65-038

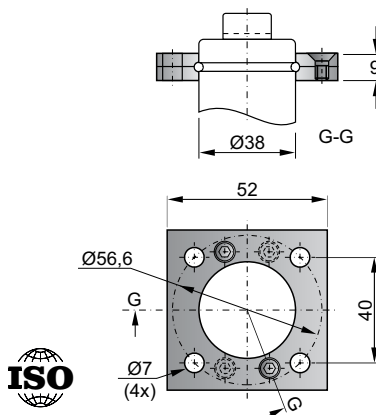


PNB-55-038

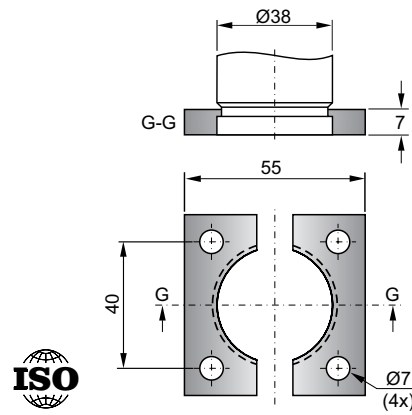

PNB-32-038

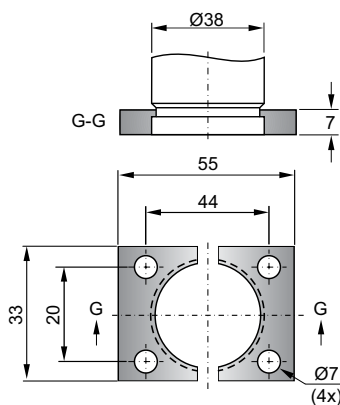

PNB-57-038

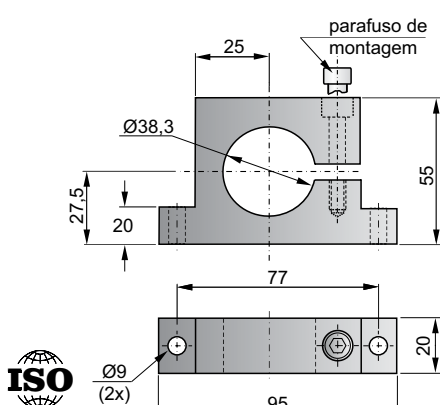

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.