
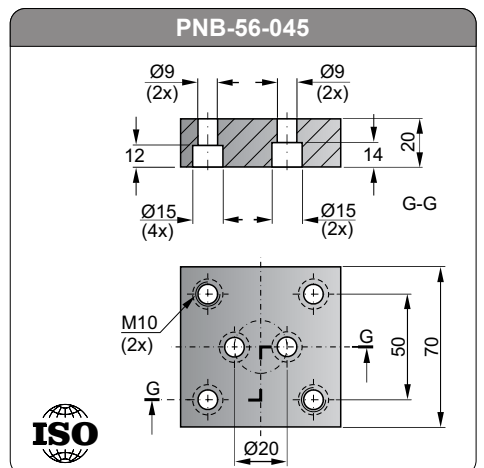
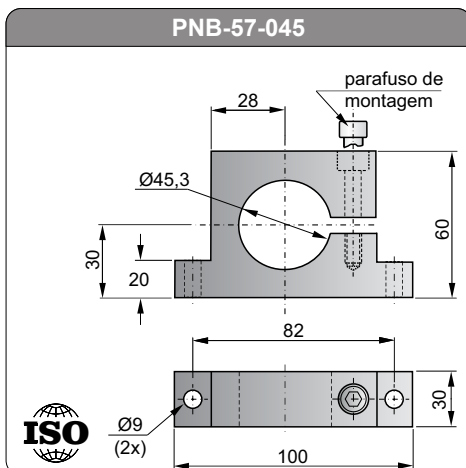
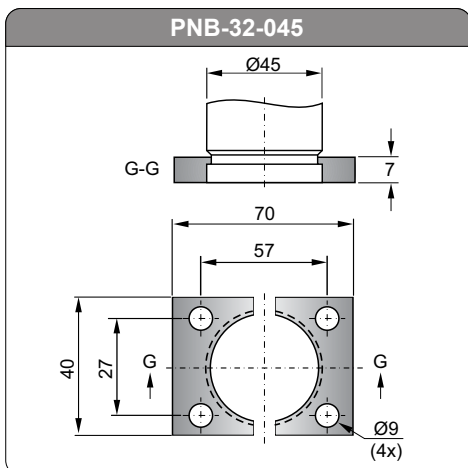
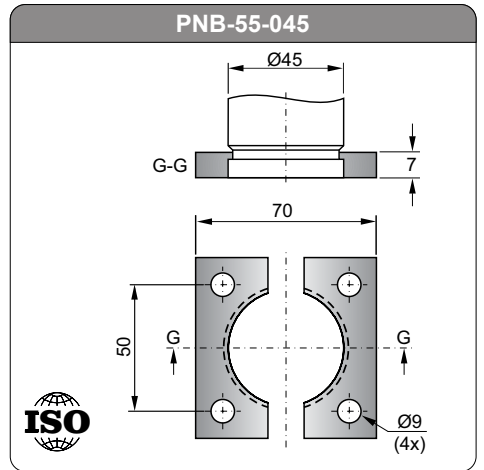
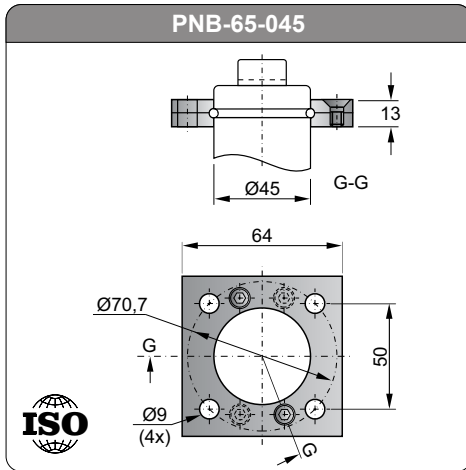
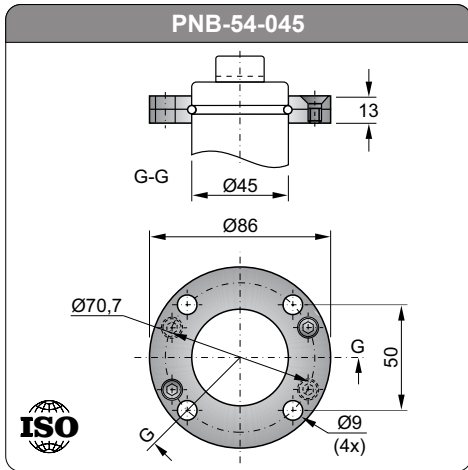


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar		L K=32 (mm)	L min. (mm)	Vol. inicial (cm ³)	Kg	ISO
		Inicial	Final*					
PNRE-0,8-010	10	736,3	1.021	52	42	17,6	0,356	
PNRE-0,8-015	15	736,3	1.073	62	47	23,4	0,390	
PNRE-0,8-020	20	736,3	1.108	72	52	29,2	0,423	
PNRE-0,8-025	25	736,3	1.132	82	57	35,0	0,460	✓
PNRE-0,8-032	32	736,3	1.156	96	64	43,2	0,502	
PNRE-0,8-038	38	736,3	1.172	108	70	50,1	0,556	✓
PNRE-0,8-050	50	736,3	1.193	132	82	64,1	0,636	✓
PNRE-0,8-063	63	736,3	1.207	158	95	79,2	0,738	✓
PNRE-0,8-075	75	736,3	1.217	182	107	93,1	0,829	
PNRE-0,8-080	80	736,3	1.220	192	112	98,9	0,862	✓
PNRE-0,8-100	100	736,3	1.230	232	132	122,2	1,001	✓
PNRE-0,8-125	125	736,3	1.238	282	157	151,2	1,186	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.

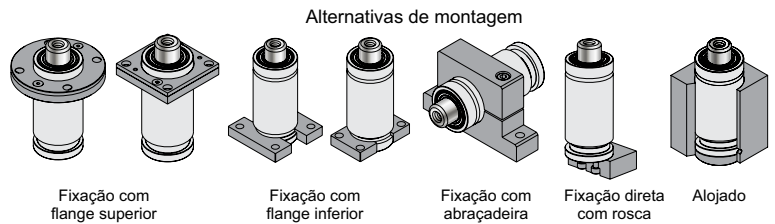

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.