



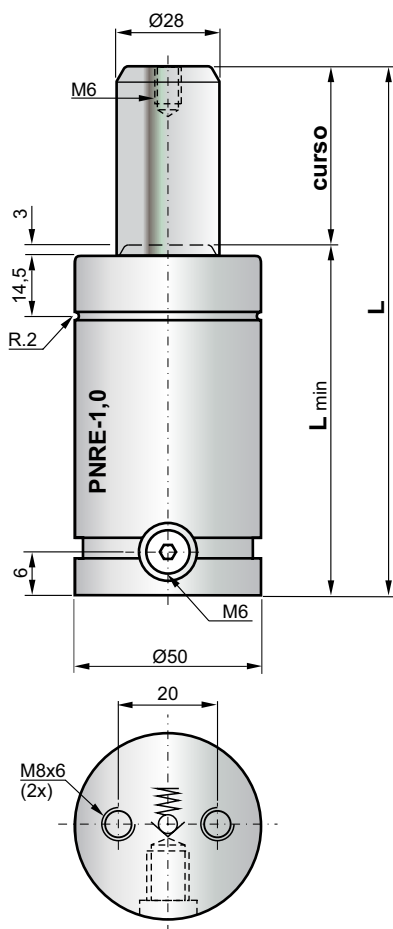


Código	Curso Cilindro (mm)	Força daN Pressão a 150bar Inicial	Final*	L K=38 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
PNRE-1,0-010	10	923,6	1.266	58	48	22,7	0,500	
PNRE-1,0-015	15	923,6	1.343	68	53	29,5	0,544	
PNRE-1,0-020	20	923,6	1.396	78	58	36,3	0,591	
PNRE-1,0-025	25	923,6	1.435	88	63	43,1	0,638	✓
PNRE-1,0-032	32	923,6	1.475	102	70	52,6	0,705	
PNRE-1,0-038	38	923,6	1.500	114	76	60,8	0,760	✓
PNRE-1,0-050	50	923,6	1.536	138	88	77,1	0,874	✓
PNRE-1,0-063	63	923,6	1.562	164	101	94,8	1.002	✓
PNRE-1,0-075	75	923,6	1.579	188	113	111,1	1.119	
PNRE-1,0-080	80	923,6	1.585	198	118	118,0	1.161	✓
PNRE-1,0-100	100	923,6	1.603	238	138	145,2	1.355	✓
PNRE-1,0-125	125	923,6	1.618	288	163	179,2	1.598	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

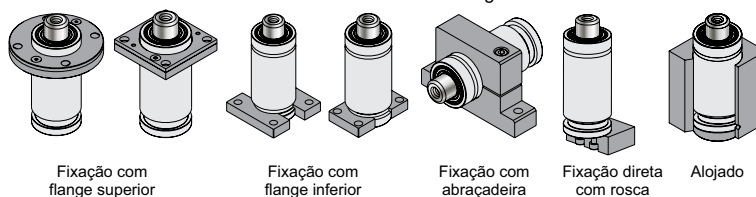


PNB-54-050

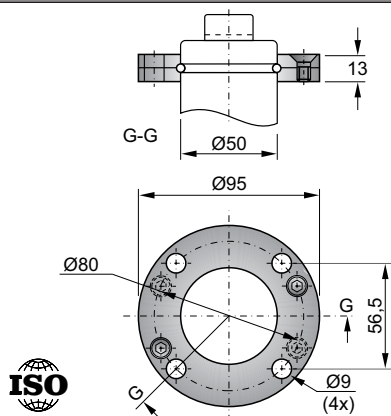


PNB-65-050

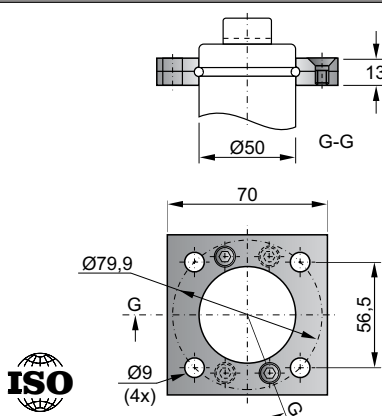


PNB-55-050

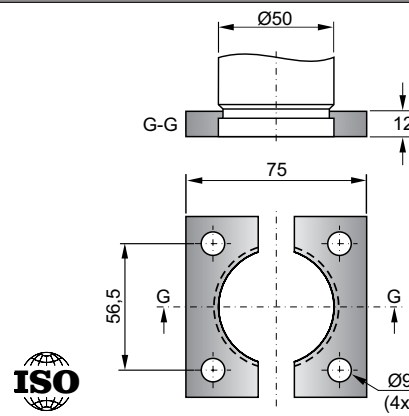


PNB-32-050

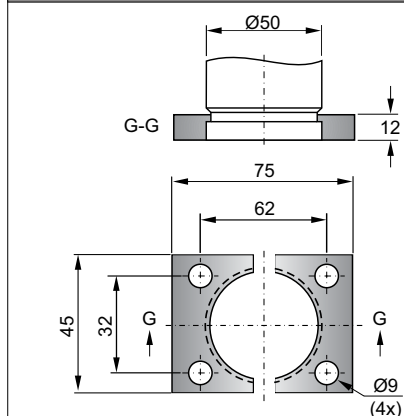

PNB-57-050

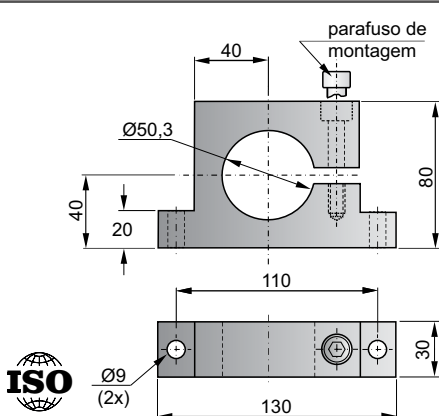

PNB-56-050

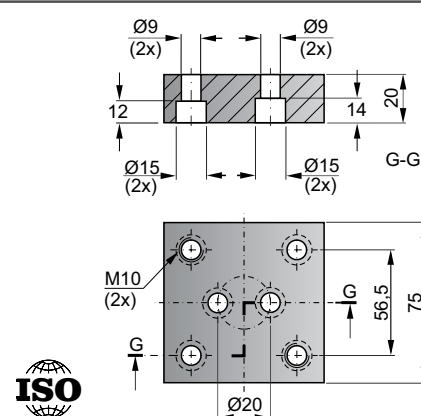

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.