



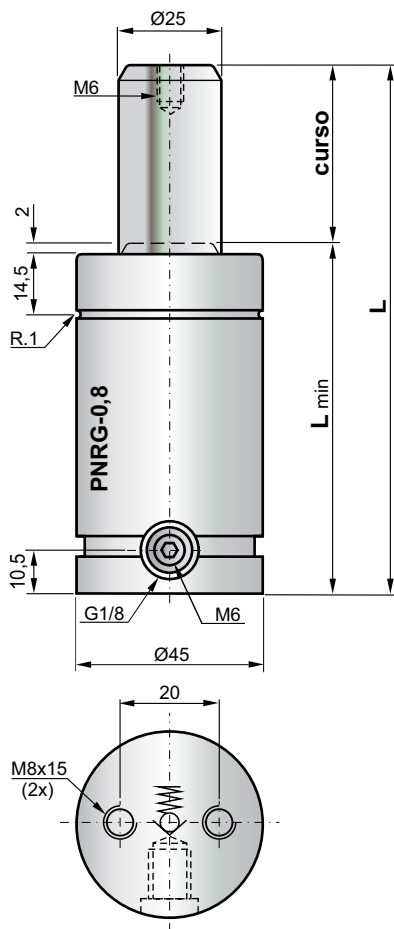


| Código       | Curso<br>Cilindro<br>(mm) | Força da N<br>Pressão a 150bar<br>Inicial | Força da N<br>Pressão a 150bar<br>Final* | L<br>K=47<br>(mm) | L<br>min.<br>(mm) | Vol.<br>inicial<br>(cm³) | Kg    |
|--------------|---------------------------|-------------------------------------------|------------------------------------------|-------------------|-------------------|--------------------------|-------|
| PNRG-0,8-010 | 10                        | 736,3                                     | 1.020                                    | 67                | 57                | 17,6                     | 0,536 |
| PNRG-0,8-015 | 15                        | 736,3                                     | 1.073                                    | 77                | 62                | 23,4                     | 0,571 |
| PNRG-0,8-020 | 20                        | 736,3                                     | 1.108                                    | 87                | 67                | 29,2                     | 0,604 |
| PNRG-0,8-025 | 25                        | 736,3                                     | 1.132                                    | 97                | 72                | 35,0                     | 0,640 |
| PNRG-0,8-032 | 32                        | 736,3                                     | 1.156                                    | 111               | 79                | 43,2                     | 0,694 |
| PNRG-0,8-038 | 38                        | 736,3                                     | 1.172                                    | 123               | 85                | 50,1                     | 0,731 |
| PNRG-0,8-050 | 50                        | 736,3                                     | 1.193                                    | 147               | 97                | 64,1                     | 0,819 |
| PNRG-0,8-063 | 63                        | 736,3                                     | 1.207                                    | 173               | 110               | 79,2                     | 0,916 |
| PNRG-0,8-075 | 75                        | 736,3                                     | 1.217                                    | 197               | 122               | 93,1                     | 0,997 |
| PNRG-0,8-080 | 80                        | 736,3                                     | 1.220                                    | 207               | 127               | 98,9                     | 1,039 |
| PNRG-0,8-100 | 100                       | 736,3                                     | 1.230                                    | 247               | 147               | 122,2                    | 1,182 |
| PNRG-0,8-125 | 125                       | 736,3                                     | 1.238                                    | 297               | 172               | 151,2                    | 1,361 |


\* Força Final Isotérmica a 20°C, curso totalmente atuado.

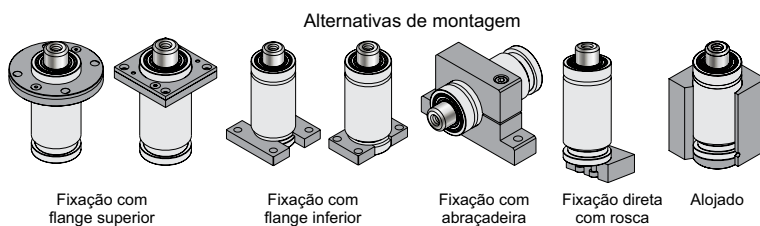


PNB-54-045

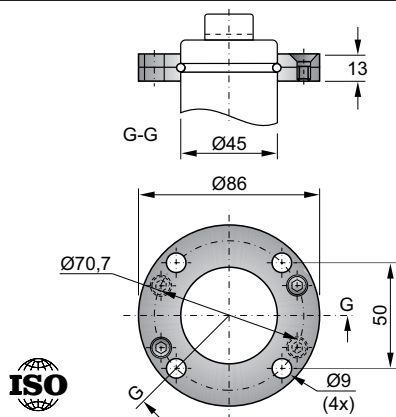


PNB-65-045

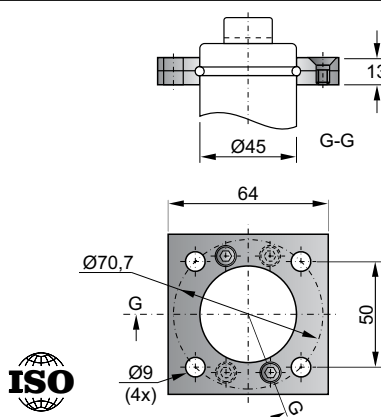


PNB-55-045

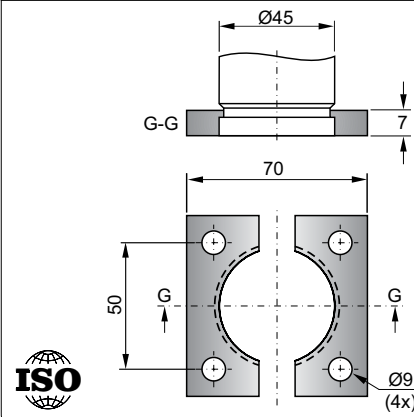


PNB-32-045

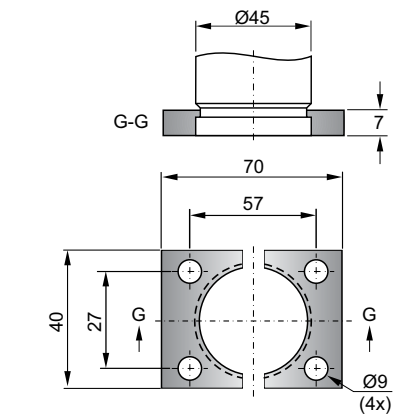

PNB-57-045

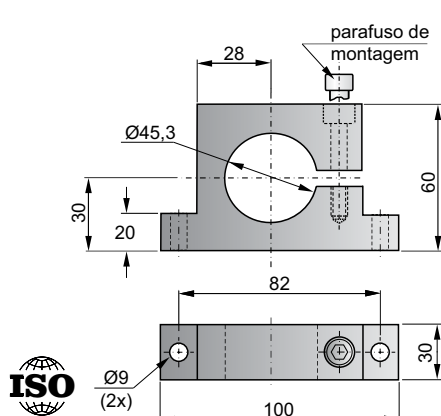

PNB-56-045

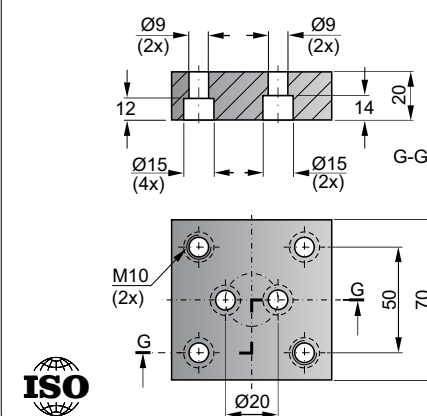

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.