



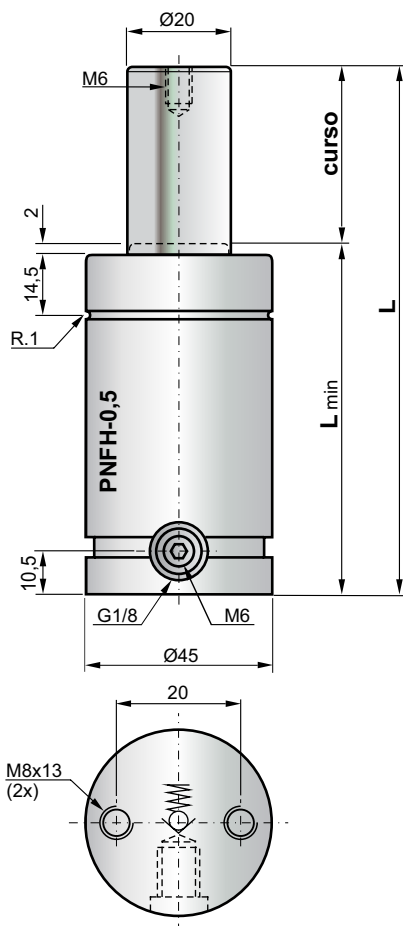


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar Inicial Final*		L K=85 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
PNFH-0,5-010	10	471,2	597,6	105	95	14,8	0,955	
PNFH-0,5-015	15	471,2	619,7	115	100	19,6	0,998	
PNFH-0,5-020	20	471,2	634,0	125	105	24,4	1.035	
PNFH-0,5-025	25	471,2	643,9	135	110	29,2	1.072	✓
PNFH-0,5-032	32	471,2	653,6	149	117	36,0	1.119	
PNFH-0,5-038	38	471,2	659,6	161	123	41,7	1.172	
PNFH-0,5-050	50	471,2	667,9	185	135	53,3	1.259	✓
PNFH-0,5-063	63	471,2	673,7	211	148	65,8	1.346	
PNFH-0,5-075	75	471,2	677,5	235	160	77,3	1.436	
PNFH-0,5-080	80	471,2	678,7	245	165	82,2	1.484	✓
PNFH-0,5-100	100	471,2	682,6	285	185	101,4	1.658	✓
PNFH-0,5-125	125	471,2	685,8	335	210	125,4	1.814	✓
PNFH-0,5-160	160	471,2	688,7	405	245	159,1	2.062	✓
PNFH-0,5-200	200	471,2	690,8	485	285	197,6	2.366	

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

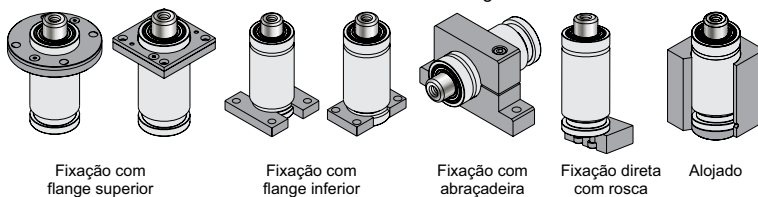


PNB-54-045

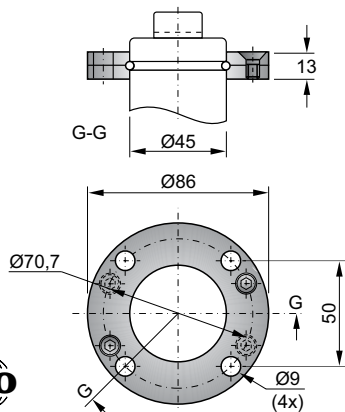


PNB-65-045

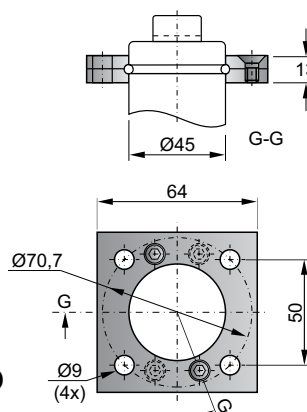


PNB-55-045

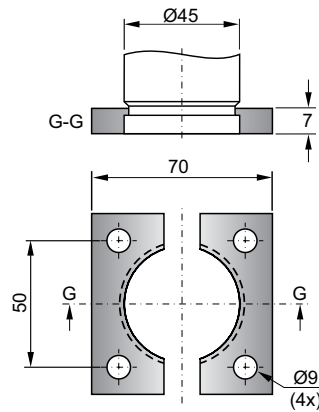


PNB-32-045

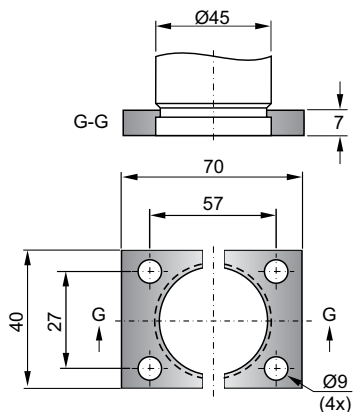

PNB-57-045

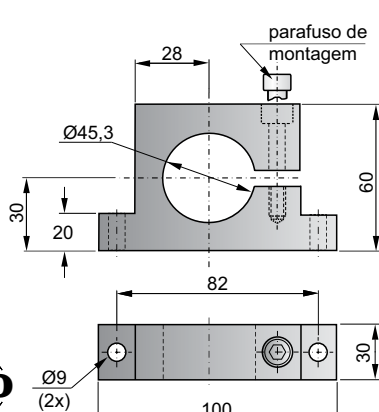

PNB-56-045

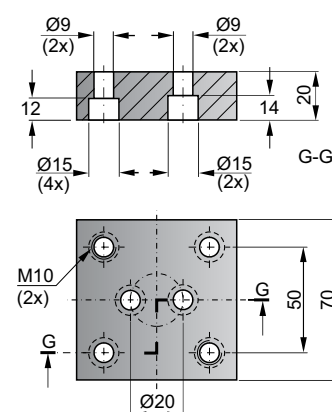

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.