



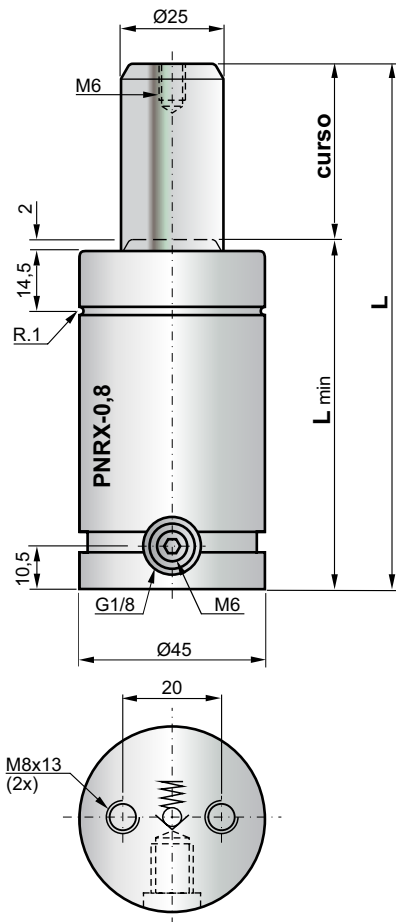


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar Inicial Final*		L K=85 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
PNRX-0,8-015	15	736,3	916,5	115	100	37,4	0,951	
PNRX-0,8-020	20	736,3	953,2	125	105	43,1	0,993	
PNRX-0,8-025	25	736,3	983,3	135	110	48,8	1.036	✓
PNRX-0,8-032	32	736,3	1.017	149	117	56,8	1.084	
PNRX-0,8-038	38	736,3	1.041	161	123	63,6	1.151	
PNRX-0,8-050	50	736,3	1.078	185	135	77,3	1.243	✓
PNRX-0,8-063	63	736,3	1.107	211	148	92,2	1.339	
PNRX-0,8-075	75	736,3	1.128	235	160	105,9	1.436	
PNRX-0,8-080	80	736,3	1.135	245	165	111,6	1.483	✓
PNRX-0,8-100	100	736,3	1.159	285	185	134,4	1.669	✓
PNRX-0,8-125	125	736,3	1.180	335	210	163,0	1.842	✓
PNRX-0,8-160	160	736,3	1.201	405	245	202,9	2.105	✓
PNRX-0,8-200	200	736,3	1.216	485	285	248,6	2.441	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

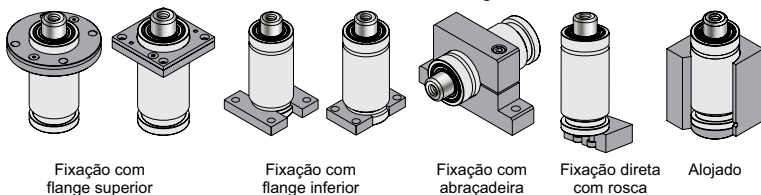


PNB-54-045

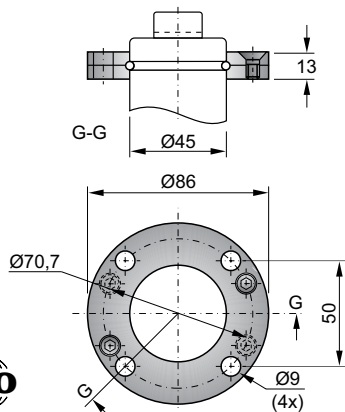


PNB-65-045

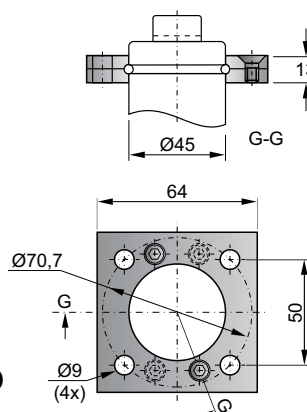


PNB-55-045

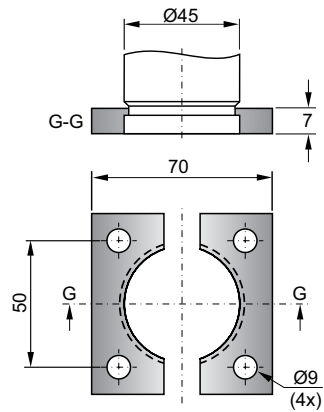


PNB-32-045

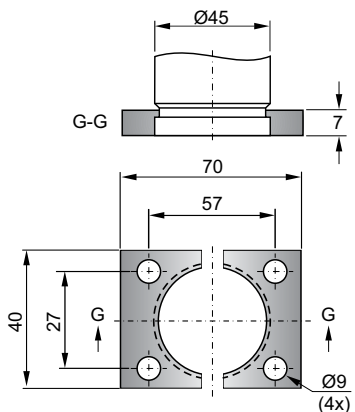

PNB-57-045

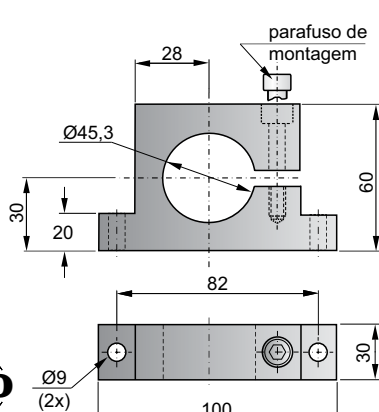

PNB-56-045

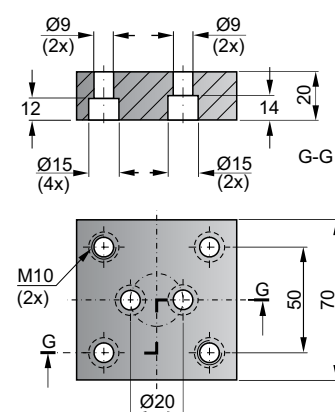

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.