



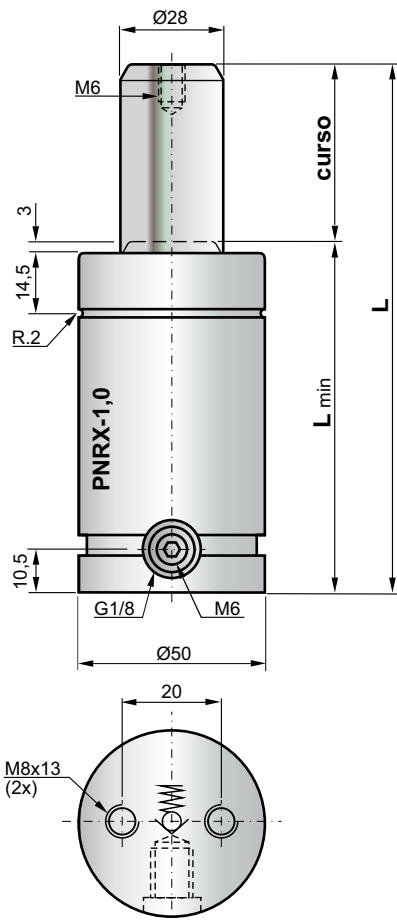


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar Inicial Final*		L K=95 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
PNRX-1,0-015	15	923,6	1.150	125	110	46,7	1.246	
PNRX-1,0-020	20	923,6	1.196	135	115	53,9	1.289	
PNRX-1,0-025	25	923,6	1.234	145	120	61,1	1.338	✓
PNRX-1,0-032	32	923,6	1.277	159	127	71,1	1.395	
PNRX-1,0-038	38	923,6	1.307	171	133	79,7	1.450	
PNRX-1,0-050	50	923,6	1.353	195	145	96,9	1.561	✓
PNRX-1,0-063	63	923,6	1.390	221	158	115,5	1.675	
PNRX-1,0-075	75	923,6	1.416	245	170	132,7	1.783	
PNRX-1,0-080	80	923,6	1.425	255	175	139,9	1.825	✓
PNRX-1,0-100	100	923,6	1.454	295	195	168,6	2.005	✓
PNRX-1,0-125	125	923,6	1.481	345	220	204,4	2.226	✓
PNRX-1,0-160	160	923,6	1.506	415	255	254,6	2.555	✓
PNRX-1,0-200	200	923,6	1.526	495	295	311,9	2.905	✓
PNRX-1,0-250	250	923,6	1.542	595	345	383,6	3.368	✓
PNRX-1,0-300	300	923,6	1.554	695	395	455,2	3.811	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

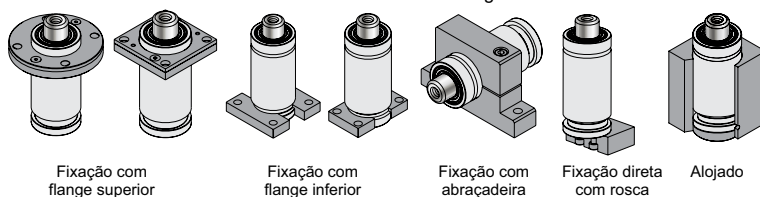


PNB-54-050

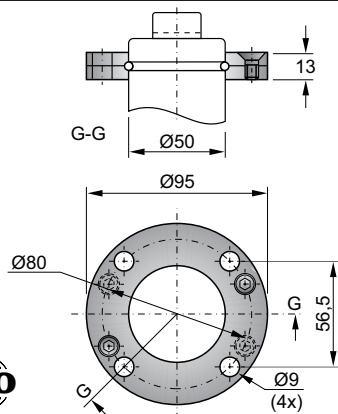


PNB-65-050

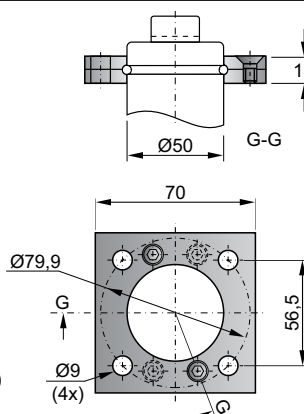


PNB-55-050

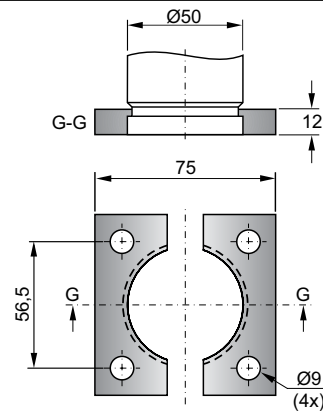


PNB-32-050

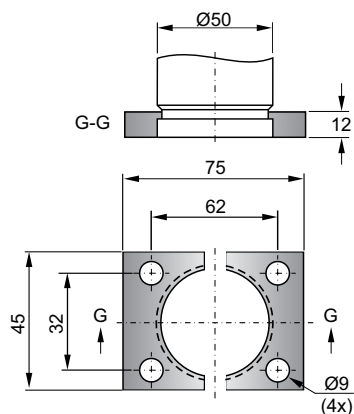

PNB-57-050

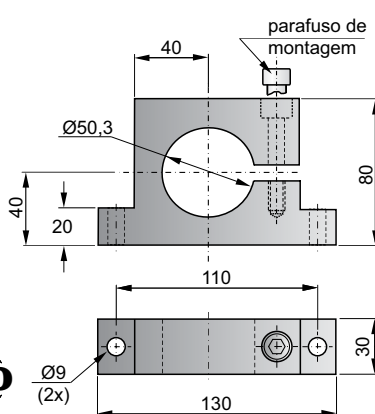

PNB-56-050

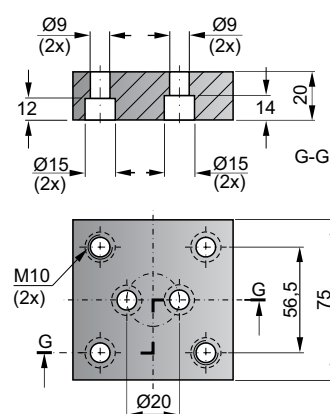

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.