



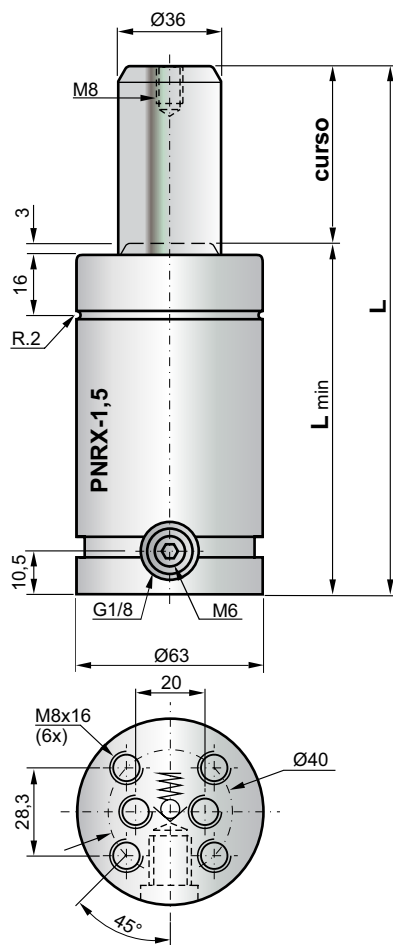


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar		L K=95 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
PNRX-1,5-015	15	1.526	1.874	125	110	82,2	1.951	
PNRX-1,5-020	20	1.526	1.943	135	115	94,9	2.013	
PNRX-1,5-025	25	1.526	1.999	145	120	107,6	2.076	✓
PNRX-1,5-032	32	1.526	2.062	159	127	125,3	2.164	
PNRX-1,5-038	38	1.526	2.106	171	133	140,5	2.235	
PNRX-1,5-050	50	1.526	2.173	195	145	171,0	2.389	✓
PNRX-1,5-063	63	1.526	2.227	221	158	203,9	2.552	
PNRX-1,5-075	75	1.526	2.264	245	170	234,3	2.703	
PNRX-1,5-080	80	1.526	2.277	255	175	247,0	2.766	✓
PNRX-1,5-100	100	1.526	2.319	295	195	297,7	3.016	✓
PNRX-1,5-125	125	1.526	2.357	345	220	361,1	3.330	✓
PNRX-1,5-160	160	1.526	2.393	415	255	449,8	3.769	✓
PNRX-1,5-200	200	1.526	2.420	495	295	551,1	4.269	✓
PNRX-1,5-250	250	1.526	2.444	595	345	677,9	4.896	✓
PNRX-1,5-300	300	1.526	2.460	695	395	804,6	5.523	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

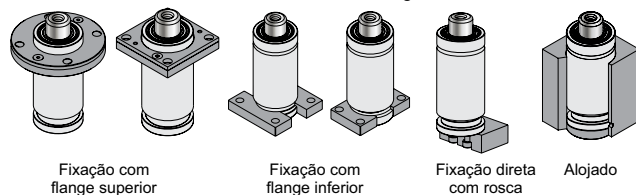


PNB-54-063

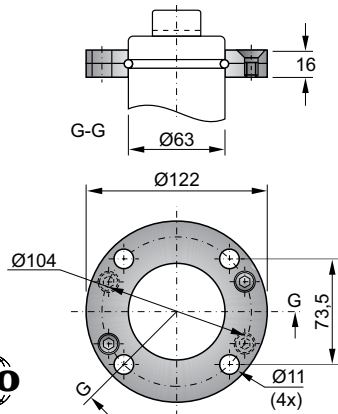


PNB-65-063-ISO

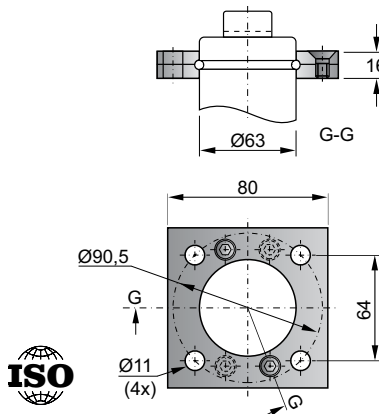


PNB-65-063

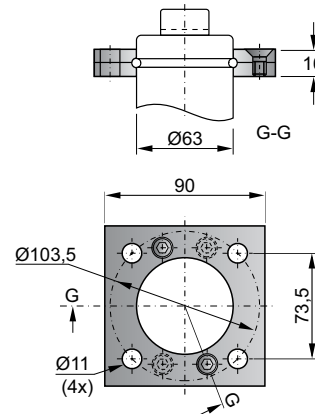


PNB-55-063

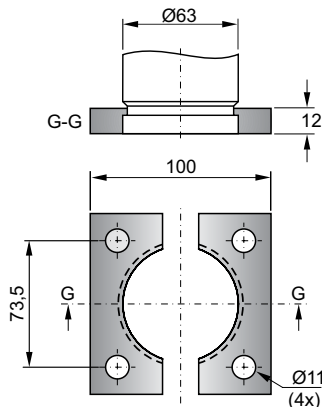

PNB-32-063

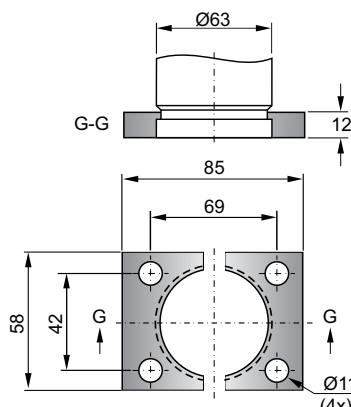

PNB-56-063

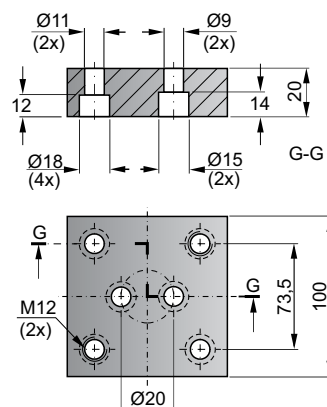

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.