



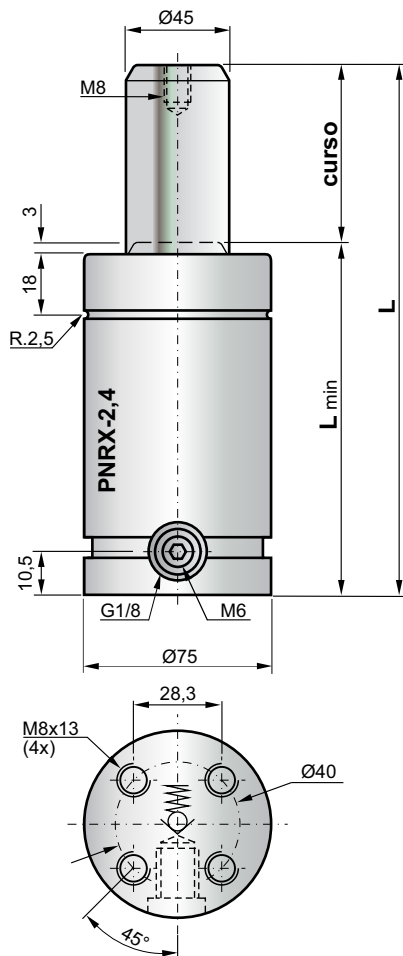


Código	Curso Cilindro (mm)	Força daN Pressão à 150bar		L K=110 (mm)	L min. (mm)	Vol. inicial (cm³)	Kg	ISO
		Inicial	Final*					
PNRX-2,4-025	25	2.385	3.086	160	135	175,0	3.264	✓
PNRX-2,4-032	32	2.385	3.190	174	142	201,7	3.377	
PNRX-2,4-038	38	2.385	3.263	186	148	224,7	3.476	
PNRX-2,4-050	50	2.385	3.378	210	160	270,6	3.694	✓
PNRX-2,4-063	63	2.385	3.471	236	173	320,3	3.906	
PNRX-2,4-075	75	2.385	3.537	260	185	366,2	4.116	
PNRX-2,4-080	80	2.385	3.561	270	190	385,3	4.212	✓
PNRX-2,4-100	100	2.385	3.638	310	210	461,8	4.549	✓
PNRX-2,4-125	125	2.385	3.708	360	235	557,4	4.979	✓
PNRX-2,4-160	160	2.385	3.775	430	270	691,2	5.533	✓
PNRX-2,4-200	200	2.385	3.827	510	310	844,2	6.274	✓
PNRX-2,4-250	250	2.385	3.872	610	360	1.035	7.078	✓
PNRX-2,4-300	300	2.385	3.904	710	410	1.226	7.957	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.


Alternativas de montagem

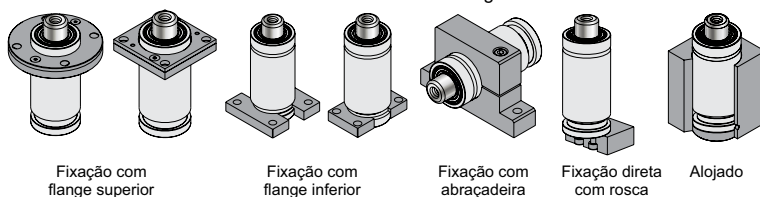


PNB-54-075

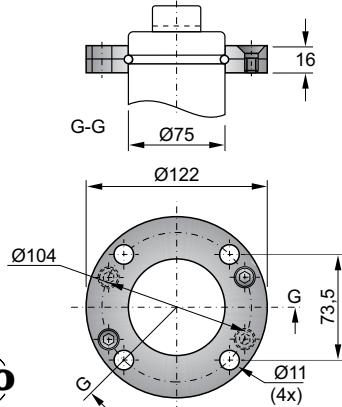


PNB-65-075

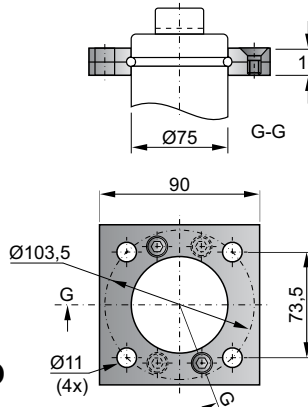


PNB-55-075

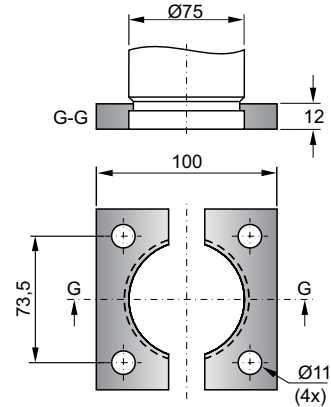


PNB-32-075

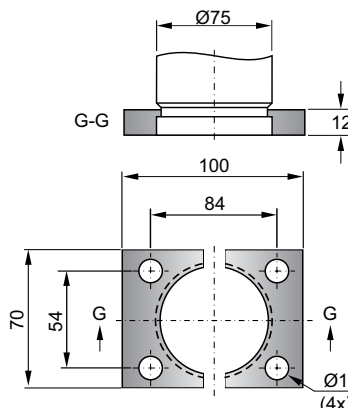

PNB-57-075

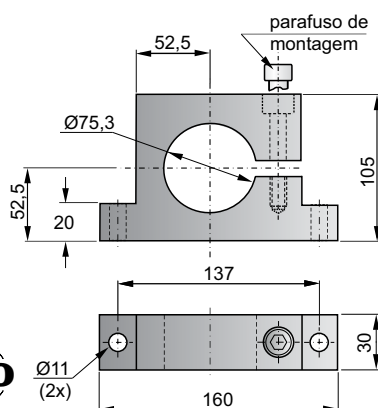

PNB-56-075

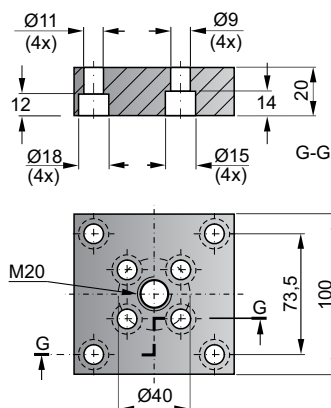

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.