

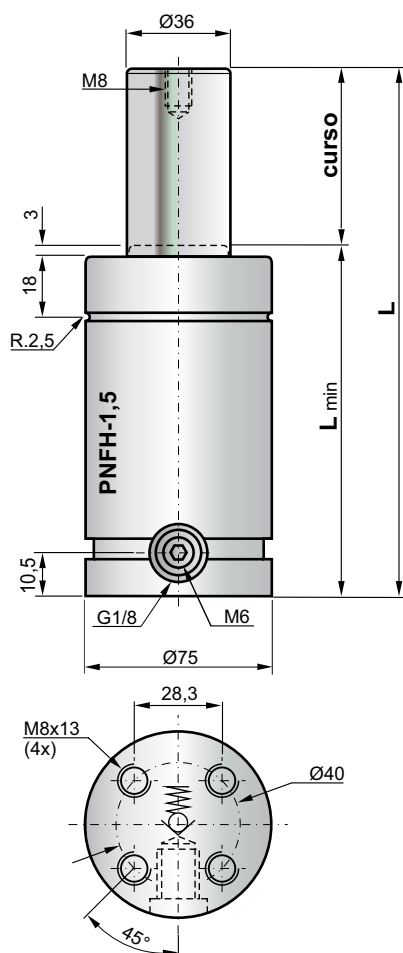
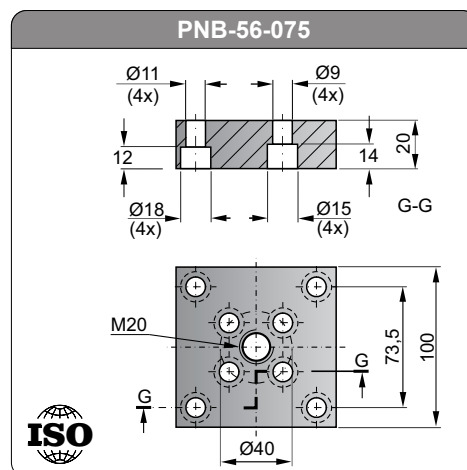
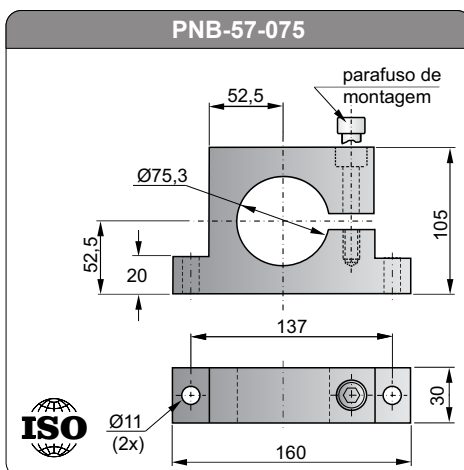
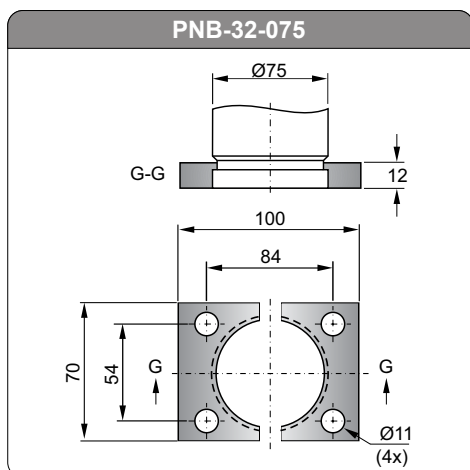
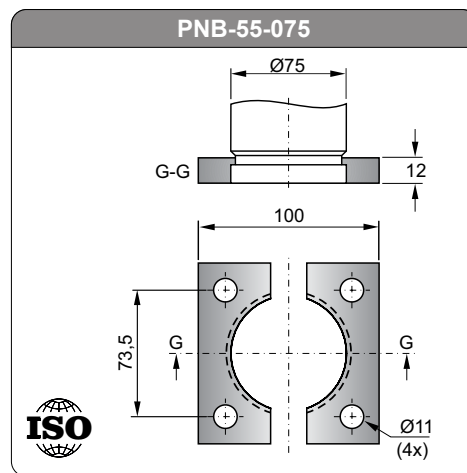
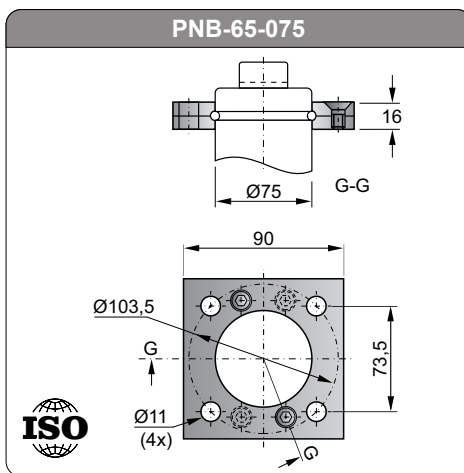


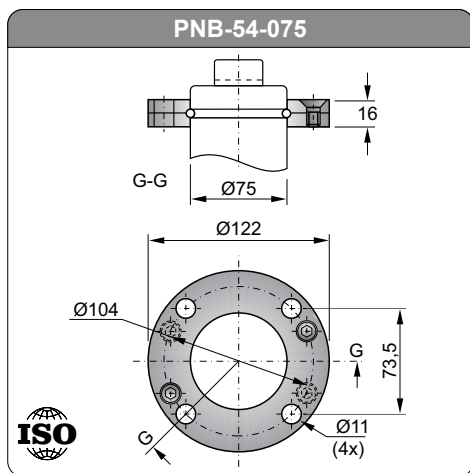

Código	Curso	Força daN		L	L	Vol.		
	Cilindro (mm)	Pressão à 150bar Inicial	Final*	K=110 (mm)	min. (mm)	inicial (cm³)		
PNFH-1,5-015	15	1.526	1.984	140	125	66,2	3.474	
PNFH-1,5-020	20	1.526	2.032	150	130	81,7	3.561	
PNFH-1,5-025	25	1.526	2.066	160	135	97,3	3.655	✓
PNFH-1,5-032	32	1.526	2.100	174	142	119,2	3.772	
PNFH-1,5-038	38	1.526	2.121	186	148	137,9	3.880	
PNFH-1,5-050	50	1.526	2.151	210	160	175,3	4.110	✓
PNFH-1,5-063	63	1.526	2.172	236	173	215,8	4.328	
PNFH-1,5-075	75	1.526	2.185	260	185	253,2	4.556	
PNFH-1,5-080	80	1.526	2.190	270	190	268,8	4.658	✓
PNFH-1,5-100	100	1.526	2.204	310	210	331,1	5.016	✓
PNFH-1,5-125	125	1.526	2.216	360	235	409,1	5.472	✓
PNFH-1,5-160	160	1.526	2.265	430	270	518,2	6.078	✓
PNFH-1,5-200	200	1.526	2.234	510	310	642,8	6.841	✓
PNFH-1,5-250	250	1.526	2.204	610	360	798,7	7.696	✓
PNFH-1,5-300	300	1.526	2.244	710	410	954,6	8.625	✓

* Força Final Isotérmica a 20°C, curso totalmente atuado.

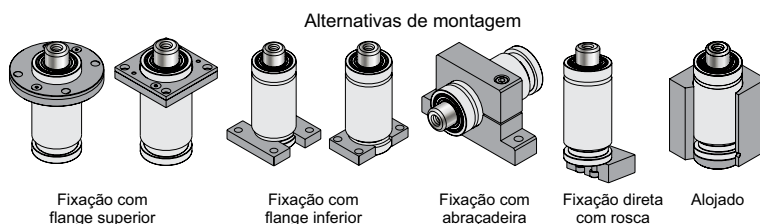

A PRODTY é detentora de patentes nacionais e internacionais, que cobrem características de seus produtos.